

ROTATIONAL EQUILIBRIUM

INTRODUCTION

Have you ever tried to pull a stubborn nail out of a board or develop your forearm muscles by lifting weights? Both these activities involve using a “lever-type” action to produce a turning effect or torque¹ through the application of a force. The same torque can be produced by applying a small force at a larger distance (with more leverage) or by applying a larger force closer to the point about which the object has to rotate. These two examples are shown in Fig. 1. In the case of the hammer pulling the nail, a small force applied at the end of the handle translates into a larger force being exerted on the nail at a smaller distance from the point where the nail is fixed to the board. In the second example the weight on the palm of the hand is at a greater distance from the elbow. This requires the muscles to apply a larger force at a smaller distance, usually less than 5 cm from the elbow. These are both examples of lever action—force applied at a distance from a *fulcrum*² or *pivot point* or *axis of rotation*. A force applied as described in the above examples results in a *torque* on a body. Torque usually produces a *rotation* of a body.

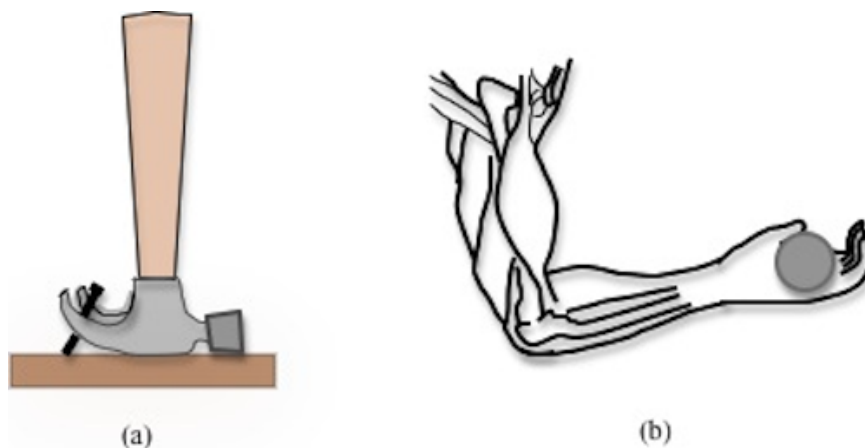


Figure 1: Two examples of torque

DISCUSSION OF PRINCIPLES

Torque is a measure of the turning effect of an applied force on an object, and is the rotational analogue to force. In translational motion, a net force causes an object to accelerate, while in rotational motion, a net torque causes an object to increase or decrease its rate of rotation. Torque τ is the product of the applied force and the perpendicular distance from the pivot point to the line of action of the force and is measured in units of N·m.

¹<http://en.wikipedia.org/wiki/Torque>

²<http://en.wikipedia.org/wiki/Lever>

$$\tau = Fr_{\perp} \tag{1}$$

where r_{\perp} is sometimes called the “lever arm.”

Note: Torque has the same units as work, i.e., force times distance. Torque and work, however, are entirely different physical concepts; the fact that they have the same units is a coincidence.

Calculation of torque

Consider the irregularly shaped two-dimensional object shown in Fig. 2a.

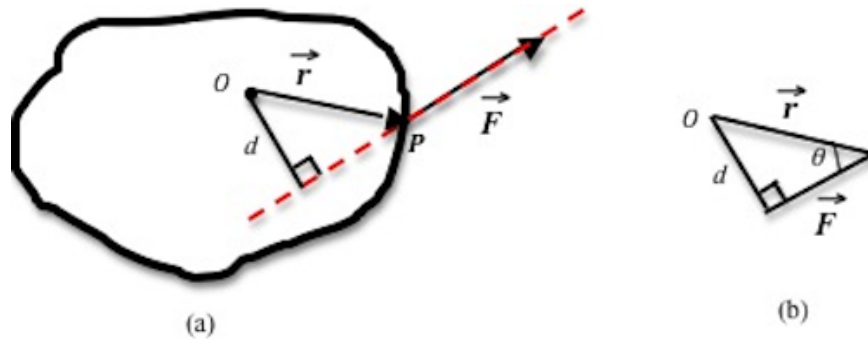


Figure 2: Illustration of lever-arm concept

A force F is applied to the object at the point P , for example, by a string attached there. The object is free to rotate about the point O by a nail driven through it at that point, but not free to have translational motion. The steps needed to calculate the torque on the object about the point O are outlined below.

1. Sketch a line through the force. This dashed line in Fig. 2a represents the *line of action* of the force.
2. Draw a perpendicular line from the axis of rotation O to the line of action of the force. This line, marked d in Fig. 2, represents the lever arm r defined in Eq. (1).

Notice that when the line of action of the force moves closer to the pivot point, the lever arm d decreases as shown in Fig. 3a and 3b. In Fig. 3c the line of action of the force passes through the pivot point. In this case the lever arm is zero and therefore the torque will be zero as well.

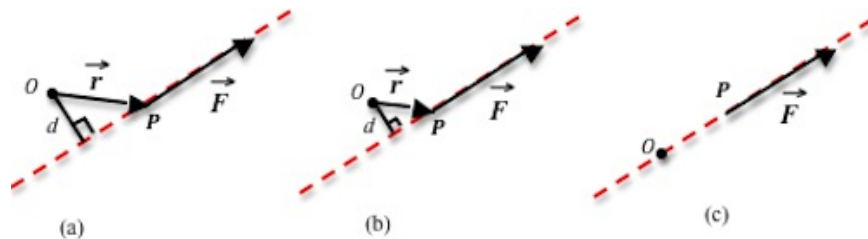


Figure 3: Dependence of lever arm on point of application of force

Since the lever arm d makes a right angle with the line of action of the force, the three quantities, d , F , and r make a right triangle. This triangle has been redrawn in Fig. 2b. From this triangle we see that the lever arm d is given by

$$d = r \sin \theta \quad (2)$$

where θ is the angle between \vec{r} and \vec{F} . Equation (1) can now be written as

$$\tau = rF \sin \theta \quad (3)$$

Net torque

If two or more forces are applied to an object, each force produces a torque. The rotation of the wheel shown in Fig. 4 is caused by the sum of the two torques.

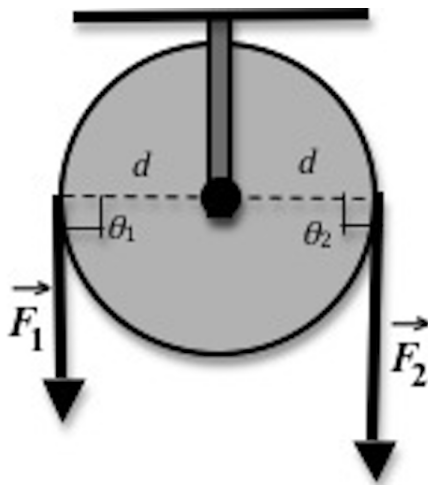


Figure 4: A wheel experiencing two torques

By convention, torques causing counterclockwise rotations are considered to be positive and torques causing clockwise rotations are negative. In the above example \vec{F}_1 will produce a positive or counterclockwise torque, while \vec{F}_2 will produce a negative or clockwise torque. For rotation about the center the magnitude of the net torque will be the algebraic sum of the two torques:

$$\tau_{\text{total}} = F_1 d_1 - F_2 d_2 \quad (4)$$

As mentioned above, torque is actually a vector. The torque vector is perpendicular to the plane formed by the vectors \vec{r} and \vec{F} . The right-hand rule³ gives the direction of the torque. Based on this rule positive torques, such as $F_1 d_1$, are directed out of the page, while negative torques, such

³http://en.wikipedia.org/wiki/File:Right_hand_rule_cross_product.svg

as F_2d_2 , are directed into the page.

Definitions of equilibrium

Torque causes rotational motion with angular (or rotational) acceleration α .

$$\tau_{\text{net}} = I\alpha \quad (5)$$

where I is the moment of inertia of the system and α is the angular acceleration. This equation is the angular equivalent of Newton's second law:

$$F_{\text{net}} = ma \quad (6)$$

When the net torque is zero, the object will not change its state of rotational motion—i.e., it will not start rotating or stop rotating or change the direction of its rotation. It is said to be in *rotational equilibrium*. If the sum of the forces acting on the object is also zero, the object is in *translational equilibrium* and will not change its state of translational motion, that is, it will not speed up or slow down or change its direction of motion. Whenever both of these conditions

$$\sum \vec{\tau} = 0 \text{ and } \sum \vec{F} = 0 \quad (7)$$

are met, the object is said to be in *static equilibrium*.

OBJECTIVE

The objective of this experiment is to learn to measure torque due to a force and to adjust the magnitude of one or more forces and their lever arms to produce static equilibrium in a meter stick balanced on a knife edge; use the conditions for equilibrium to determine the mass of the meter stick and the mass of an unknown object.

EQUIPMENT

Meter stick

Knife edge

Known masses of varying values

Unknown mass

Balance

PROCEDURE

There are three parts to this experiment. In the first part, you will balance three forces on a meter stick and show that the net torque is zero when the meter stick is in equilibrium. In the second part you will balance the weight of the meter stick against a known weight to determine the mass of the meter stick. Finally you will use the principle of rotational equilibrium to determine the mass of an unknown object.

All lever arm distances are measured from the knife edge, which serves as the point of support.

You will be using rubber bands to hang the weights on the meter stick. Assume that the masses of the rubber bands are negligible.

Procedure A: Balancing Torques

1. Balance the meter stick on the knife edge. The point at which the stick balances is the *center of gravity* of the meter stick. Enter this value on the worksheet.
2. Select two 200-gram masses and one 100-gram mass.
3. Refer to Fig. 5 and Fig. 6. Place a hanger at the 20-cm mark, a distance x_1 cm to the left of the center of gravity and place mass $m_1 = 200$ g on it.

Place another hanger at the 65-cm mark, a distance x_2 cm to the right of the center of gravity and place a mass $m_2 = 200$ g on it.

Enter these values in Data Table 1.

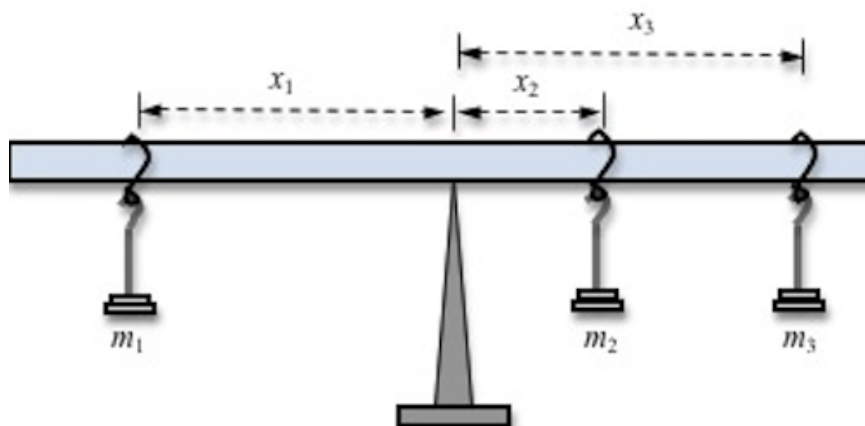


Figure 5: Three balanced torques



Figure 6: Photo of experimental set-up

4. Calculate the torques due to m_1 and m_2 and enter these values in Data Table 1.

Be sure to include the sign of the torques.

5. Using the appropriate sign for each torque we can write the condition for rotational equilibrium as

$$\sum \tau = m_1gx_1 - m_2gx_2 - m_3gx_3 = 0 \quad (8)$$

6. Use Eq. (8) and the values of the torques due to m_1 and m_2 to predict the torque due to m_3 (including its sign) and enter this value in Data Table 1.

Be sure to include the sign of the torques.

7. Use the predicted value of the torque due to m_3 to predict the position of x_3 at which the third mass m_3 must be placed to balance the meter stick. Enter this value on the worksheet.

8. Experimentally determine the position x_3 of m_3 and enter this value on the worksheet.

9. Compare the two values for the position x_3 by finding the percent difference between the predicted and experimental values of x_3 . See Appendix B.

CHECKPOINT 1: Ask your TA to check your set-up and calculations.

Procedure B: Finding the Mass of a Meter Stick

For this part of the experiment you will use a 200-gram mass, the meter stick and the knife edge.

10. Move the knife edge to the 25-cm mark.

You will notice that the meter stick is no longer in equilibrium. The unbalanced force is the weight of the meter stick acting at its center of gravity.

11. Experimentally find the position, x_1 of the 200-gram mass, needed to balance the meter stick. Enter the value of x_1 on the worksheet.

12. In the space provided on the worksheet, sketch and carefully label a diagram of the meter stick and the 200-gram mass.

Show all the torque-producing forces. Remember that the weight of the meter stick acts at its center of gravity.

Indicate on your diagram the directions (clockwise or counterclockwise) of each torque.

13. Calculate the torque due to the 200-gram mass and enter this value in Data Table 2.

14. Use the value of the torque due to the 200-gram mass and the conditions for rotational equilibrium to determine the torque due to the mass m_2 of the meter stick. Enter this value in Data Table 2.

15. Using the value of the torque determined in step 14, calculate the value of the mass of the meter stick m_2 . Enter this value on the worksheet.

16. Use the balance to measure the mass of the meter stick.

17. Compare the measured and calculated values of the mass of the meter stick by computing the percent difference.

CHECKPOINT 2: Ask your TA to check your diagram, set-up and calculations.

Procedure C: Determining an Unknown Mass

18. Position the center of gravity of the meter stick over the support.

19. Place a 50-gram mass m_1 at the 70-cm mark and a 200-gram mass m_2 at the 20-cm mark.

20. You will tie the free end of the string to a shot bucket around the 1-cm mark and hang it over the pulley as shown in Fig. 7 and Fig. 8.

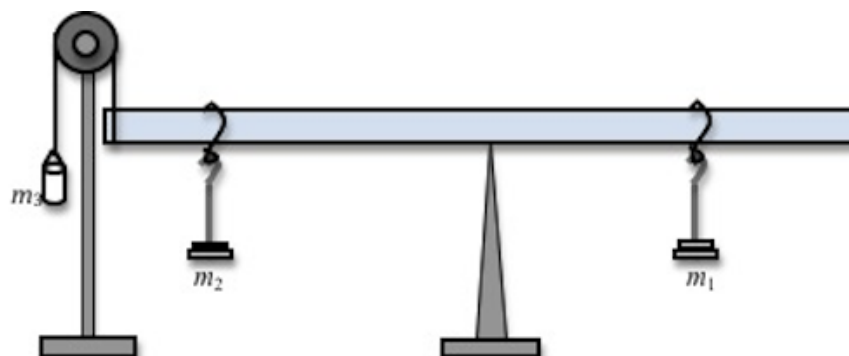


Figure 7: Set-up for determining an unknown mass



Figure 8: Photo of set-up for determining an unknown mass

21. In the space provided on the worksheet, sketch and carefully label a diagram of this set-up. Show all the torque-producing forces. Indicate on your diagram the directions (clockwise or counterclockwise) of each torque.
22. Calculate the torques due to m_1 and m_2 , and enter these values in Data Table 3.
23. Use the values of the torques due to the two masses and the conditions for rotational equilibrium to determine the torque due to m_3 . Enter this value in Data Table 3.
24. Now add small masses to the bucket until the stick balances.
25. Determine the mass m_3 of the shot and bucket using a balance.
26. Compute the percent difference between the experimental and predicted values for the mass of the shot plus bucket.

CHECKPOINT 3: Ask your TA to check your set-up, diagram and calculations.