6

Energy of a System

CHAPTER OUTLINE

6.1 Systems and Environments

6.2 Work Done by a Constant Force

6.3 The Scalar Product of Two Vectors

6.4 Work Done by a Varying Force

6.5 Kinetic Energy and the Work-Kinetic Energy Theorem

6.6 Potential Energy of a System

6.7 Conservative and Nonconservative Forces

6.8 Relationship Between Conservative Forces and Potential Energy

6.9 Potential Energy for Gravitational and Electric Forces

6.10 Energy Diagrams and Equilibrium of a System

6.11 Context Connection: Potential Energy in Fuels

* An asterisk indicates an item new to this edition.

ANSWERS TO OBJECTIVE QUESTIONS

***OQ6.1** Answer (c). Assuming that the cabinet has negligible speed during the operation, all of the work Alex does is used increasing the gravitational potential energy of the cabinet-Earth system. However, in addition to increasing the gravitational potential energy of the cabinet-Earth system by the same amount as Alex did, John must do work overcoming the friction between the cabinet and ramp. This means that the total work done by John is greater than that done by Alex.

***OQ6.2** Answer (c). The net work needed to accelerate the object from $v = 0$ to v is

$$W_1 = KE_{1f} - KE_{1i} = \frac{1}{2}mv^2 - \frac{1}{2}m(0)^2 = \frac{1}{2}mv^2$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

The work required to accelerate the object from speed v to speed $2v$ is

$$W_2 = KE_{2f} - KE_{2i} = \frac{1}{2}m(2v)^2 - \frac{1}{2}mv^2$$

$$= \frac{1}{2}m\left(4v^2 - v^2\right) = 3\left(\frac{1}{2}mv^2\right) = 3W_1$$

***OQ6.3** Answer (a). The work done on the wheelbarrow by the worker is

$$W = (F\cos\theta)\Delta x = (50\text{ N})(5.0\text{ m}) = +250\text{ J}$$

***OQ6.4** Answer (b). Since the rollers on the ramp used by David were frictionless, he did not do any work overcoming nonconservative forces as he slid the block up the ramp. Neglecting any change in kinetic energy of the block (either because the speed was constant or was essentially zero during the lifting process), the work done by either Mark or David equals the increase in the gravitational potential energy of the block-Earth system as the block is lifted from the ground to the truck bed. Because they lift identical blocks through the same vertical distance, they do equal amounts of work.

***OQ6.5** Answer (e). Kinetic energy is proportional to mass.

***OQ6.6** (i) Answer (b). Tension is perpendicular to the motion. (ii) Answer (c). Air resistance is opposite to the motion.

***OQ6.7** Answer (e). As the block falls freely, only the conservative gravitational force acts on it. Therefore, mechanical energy is conserved, or $KE_f + PE_f = KE_i + PE_i$. Assuming that the block is released from rest ($KE_i = 0$), and taking $y = 0$ at ground level ($PE_f = 0$), we have that

$$KE_f = PE_i \quad \text{or} \quad \frac{1}{2}mv_f^2 = mgy \quad \text{and} \quad y_i = \frac{v_f^2}{2g}$$

Thus, to double the final speed, it is necessary to increase the initial height by a factor of four.

***OQ6.8** Answer (d). The work–energy theorem states that $W_{\text{net}} = \Delta K = K_f - K_i$. Thus, if $W_{\text{net}} = 0$, then $K_f = K_i$ or $\frac{1}{2}mv_f^2 = \frac{1}{2}mv_i^2$, which leads to the conclusion that the speed is unchanged ($v_f = v_i$). The velocity of the particle involves both magnitude (speed) and direction. The work–energy theorem shows that the magnitude or speed is unchanged when $W_{\text{net}} = 0$, but makes no statement about the direction of the velocity.

***OQ6.9** The answer is a > b = e > d > c. Each dot product has magnitude (1)·(1)·cos θ, where θ is the angle between the two factors. Thus for (a)

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

we have cos 0 = 1. For (b) and (e), cos 45° = 0.707. For (c), cos 180° = −1. For (d), cos 90° = 0.

***OQ6.10** (i) Answers (c) and (e). The force of block on spring is equal in magnitude and opposite to the force of spring on block.

(ii) Answers (c) and (e). The spring tension exerts equal-magnitude forces toward the center of the spring on objects at both ends.

***OQ6.11** Answer (a). Kinetic energy is proportional to squared speed. Doubling the speed makes an object's kinetic energy four times larger.

***OQ6.12** Answer (c). The system consisting of the cart's fixed, initial kinetic energy is the mechanical energy that can be transformed due to friction from the surface. Therefore, the loss of mechanical energy is $\Delta E_{\text{mech}} = -f_k d = -(6\text{ N})(0.06\text{ m}) = 0.36\text{ J}$. This product must remain the same in all cases. For the cart rolling through gravel, $-(9\text{ N})(d) = 0.36\text{ J}$ tells us $d = 4$ cm.

***OQ6.13** Answer (a). The system consisting of the cart's fixed, initial kinetic energy is the mechanical energy that can be transformed due to friction from the surface. Therefore, the loss of mechanical energy is $\Delta E_{\text{mech}} = -f_k d = -(6\text{ N})(0.06\text{ m}) = 0.36\text{ J}$. This product must remain the same in all cases. For the cart rolling through gravel, $-(f_k)(0.18\text{ m}) = 0.36\text{ J}$ tells us $f_k = 2$ N.

***OQ6.14** Answer (d). $4.00\text{ J} = \frac{1}{2}k(0.100\text{ m})^2$. Therefore, $k = 800$ N/m and to stretch the spring to 0.200 m requires extra work

$$\Delta W = \frac{1}{2}(800)(0.200)^2 - 4.00\text{ J} = 12.0\text{ J}$$

***OQ6.15** (i) Answer: a = b = c = d. The gravitational acceleration is quite precisely constant at locations separated by much less than the radius of the planet.

(ii) Answer: c = d > a = b. The mass but not the elevation affects the gravitational force.

(iii) Answer: c > b = d > a. Gravitational potential energy of the object-Earth system is proportional to mass times height.

***OQ6.16** Answer (c). The ice cube is in neutral equilibrium. Its zero acceleration is evidence for equilibrium.

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

ANSWERS TO CONCEPTUAL QUESTIONS

***CQ6.1** (a) Positive work is done by the chicken on the dirt.

(b) The person does no work on anything in the environment. Perhaps some extra chemical energy goes through being energy transmitted electrically and is converted into internal energy in his brain; but it would be very hard to quantify "extra."

(c) Positive work is done on the bucket.

(d) Negative work is done on the bucket.

(e) Negative work is done on the person's torso.

***CQ6.2** Work is only done in accelerating the ball from rest. The work is done over the effective length of the pitcher's arm—the distance his hand moves through windup and until release. He extends this distance by taking a step forward.

***CQ6.3** $k' = 2k$. Think of the original spring as being composed of two half-springs. The same force F that stretches the whole spring by x stretches each of the half-springs by $x/2$; therefore, the spring constant for each of the half-springs is $k' = [F/(x/2)] = 2(F/x) = 2k$.

***CQ6.4** The scalar product of two vectors is positive if the angle between them is between 0° and 90°, including 0°. The scalar product is negative when $90° < \theta \leq 180°$.

***CQ6.5** No. Kinetic energy is always positive. Mass and squared speed are both positive.

***CQ6.6** Force of tension on a ball moving in a circle on the end of a string. Normal force and gravitational force on an object at rest or moving across a level floor.

***CQ6.7** Yes. As you ride an express subway train, a backpack at your feet has no kinetic energy as measured by you since, according to you, the backpack is not moving. In the frame of reference of someone on the side of the tracks as the train rolls by, the backpack is moving and has mass, and thus has kinetic energy.

***CQ6.8** (a) Not necessarily. It does if it makes the object's speed change, but not if it only makes the direction of the velocity change.

(b) Yes, according to Newton's second law.

***CQ6.9** Yes. The floor of a rising elevator does work on a passenger. A normal force exerted by a stationary solid surface does no work.

***CQ6.10** There is no violation. Choose the book as the system. You did positive work (average force and displacement are in same direction)

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

and the Earth did negative work (average force and displacement are in opposite directions) on the book. The average force you exerted just counterbalanced the weight of the book. The total work on the book is zero, and is equal to its overall change in kinetic energy.

***CQ6.11** It is sometimes true. If the object is a particle initially at rest, the net work done on the object is equal to its final kinetic energy. If the object is not a particle, the work could go into (or come out of) some other form of energy. If the object is initially moving, its initial kinetic energy must be added to the total work to find the final kinetic energy.

***CQ6.12** Yes. Object 1 exerts some forward force on object 2 as they move through the same displacement. By Newton's third law, object 2 exerts an equal-size force in the opposite direction on object 1. In $W = F\Delta r\cos\theta$, the factors F and Δr are the same, and θ differs by 180°, so object 2 does −15.0 J of work on object 1. The energy transfer is 15 J from object 1 to object 2, which can be counted as a change in energy of −15 J for object 1 and a change in energy of +15 J for object 2.

SOLUTIONS TO END-OF-CHAPTER PROBLEMS

Section 6.2 Work Done by a Constant Force

***P6.1** (a) The work done by a constant force is given by

$$W = Fd\cos\theta$$

where θ is the angle between the force and the displacement of the object. In this case, $F = -mg$ and $\theta = 180°$, giving

$$W = (281.5\text{ kg})(9.80\text{ m/s}^2)[(17.1\text{ cm})(1\text{ m}/10^2\text{ cm})] = \boxed{472\text{ J}}$$

(b) If the object moved upward at constant speed, the net force acting on it was zero. Therefore, the magnitude of the upward force applied by the lifter must have been equal to the weight of the object:

$$F = mg = (281.5\text{ kg})(9.80\text{ m/s}^2) = 2.76\times10^3\text{ N} = \boxed{2.76\text{ kN}}$$

P6.2 (a) $W = mgh = \left(3.35\times10^{-5}\text{ kg}\right)\left(9.80\text{ m/s}^2\right)(100\text{ m}) = \boxed{3.28\times10^{-2}\text{ J}}$

(b) Since $R = mg$, $W_{\text{air resistance}} = \boxed{-3.28\times10^{-2}\text{ J}}$

P6.3 (a) $W = F\Delta r\cos\theta = (16.0\text{ N})(2.20\text{ m})\cos 25.0° = \boxed{31.9\text{ J}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b), (c) The normal force and the weight are both at 90° to the displacement in any time interval. Both do $\boxed{0}$ work.

(d) $\sum W = 31.9\text{ J} + 0 + 0 = \boxed{31.9\text{ J}}$

***P6.4** Assuming the mass is lifted at constant velocity, the total upward force exerted by the two men equals the weight of the mass: $F_{\text{total}} = mg = (653.2\text{ kg})(9.80\text{ m/s}^2) = 6.40 \times 10^3\text{ N}$. They exert this upward force through a total upward displacement of 96 inches (4 inches per lift for each of 24 lifts). The total work would then be

$$W_{\text{total}} = (6.40 \times 10^3\text{ N})[(96\text{ in})(0.025\,4\text{ m}/1\text{ in})] = \boxed{1.56 \times 10^4\text{ J}}$$

P6.5 **METHOD ONE**

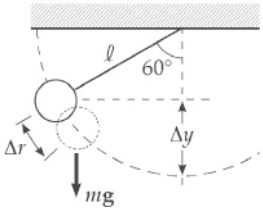

ANS. FIG. P6.5

Let ϕ represent the instantaneous angle the rope makes with the vertical as it is swinging up from $\phi_i = 0$ to $\phi_f = 60^\circ$. In an incremental bit of motion from angle ϕ to $\phi + d\phi$, the definition of radian measure implies that $\Delta r = (12\text{ m})d\phi$. The angle θ between the incremental displacement and the force of gravity is $\theta = 90^\circ + \phi$. Then

$$\cos\theta = \cos(90^\circ + \phi) = -\sin\phi.$$

The work done by the gravitational force on Spiderman is

$$W = \int_i^f F\cos\theta\,dr = \int_{\phi=0}^{\phi=60^\circ} mg(-\sin\phi)(12\text{ m})d\phi$$

$$= -mg(12\text{ m})\int_0^{60^\circ}\sin\phi\,d\phi = (-80\text{ kg})\left(9.8\text{ m/s}^2\right)(12\text{ m})(-\cos\phi)\Big|_0^{60^\circ}$$

$$= (-784\text{ N})(12\text{ m})(-\cos 60^\circ + 1) = \boxed{-4.70 \times 10^3\text{ J}}$$

METHOD TWO

The force of gravity on Spiderman is $mg = (80\text{ kg})(9.8\text{ m/s}^2) = 784\text{ N}$ down. Only his vertical displacement contributes to the work gravity does. His original y coordinate below the tree limb is –12 m. His final y coordinate is $(-12\text{ m})\cos 60^\circ = -6\text{ m}$. His change in elevation is –6 m – (–12 m). The work done by gravity is

$$W = F\Delta r\cos\theta = \left(784\text{ N}\right)\left(6\text{ m}\right)\cos 180^\circ = \boxed{-4.70\text{ kJ}}$$

***P6.6** (a) The 35-N force applied by the shopper makes a 25° angle with the displacement of the cart (horizontal). The work done on the cart by the shopper is then

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$W_{\text{shopper}} = (F\cos\theta)\Delta x = (35\text{ N})(\cos 25°)(50.0\text{ m}) = \boxed{1.6\times10^{3}\text{ J}}$$

(b) Since the speed of the cart is constant,

$KE_f = KE_i$ and $W_{\text{net}} = \Delta KE = \boxed{0}$

(c) The force exerted by the shopper is now completely horizontal and will be equal to the friction force, since the cart stays at a constant velocity. In parts (a) and (b), the shopper's force had a downward vertical component, increasing the normal force on the cart, and thereby the friction force. Because there is no vertical component here, the friction force will be less, and the boxed{the force is smaller} than before.

(d) Since the horizontal component of the force is less in part (c), the work performed by the shopper on the cart over the same 50.0-m distance is boxed{smaller} in part (c).

Section 6.3 The Scalar Product of Two Vectors

***P6.7** $A = 5.00$; $B = 9.00$; $\theta = 50.0°$

$$\vec{\mathbf{A}}\cdot\vec{\mathbf{B}} = AB\cos\theta = (5.00)(9.00)\cos 50.0° = \boxed{28.9}$$

P6.8

$$\vec{\mathbf{A}}\cdot\vec{\mathbf{B}} = \left(A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}\right)\cdot\left(B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}\right)$$

$$\vec{\mathbf{A}}\cdot\vec{\mathbf{B}} = A_xB_x\left(\hat{\mathbf{i}}\cdot\hat{\mathbf{i}}\right) + A_xB_y\left(\hat{\mathbf{i}}\cdot\hat{\mathbf{j}}\right) + A_xB_z\left(\hat{\mathbf{i}}\cdot\hat{\mathbf{k}}\right)$$
$$+ A_yB_x\left(\hat{\mathbf{j}}\cdot\hat{\mathbf{i}}\right) + A_yB_y\left(\hat{\mathbf{j}}\cdot\hat{\mathbf{j}}\right) + A_yB_z\left(\hat{\mathbf{j}}\cdot\hat{\mathbf{k}}\right)$$
$$+ A_zB_x\left(\hat{\mathbf{k}}\cdot\hat{\mathbf{i}}\right) + A_zB_y\left(\hat{\mathbf{k}}\cdot\hat{\mathbf{j}}\right) + A_zB_z\left(\hat{\mathbf{k}}\cdot\hat{\mathbf{k}}\right)$$

And since $\hat{\mathbf{i}}\cdot\hat{\mathbf{i}} = \hat{\mathbf{j}}\cdot\hat{\mathbf{j}} = \hat{\mathbf{k}}\cdot\hat{\mathbf{k}} = 1$ and $\hat{\mathbf{i}}\cdot\hat{\mathbf{j}} = \hat{\mathbf{i}}\cdot\hat{\mathbf{k}} = \hat{\mathbf{j}}\cdot\hat{\mathbf{k}} = 0$,

$$\vec{\mathbf{A}}\cdot\vec{\mathbf{B}} = \boxed{A_xB_x + A_yB_y + A_zB_z}$$

P6.9 (a) $W = \vec{\mathbf{F}}\cdot\Delta\vec{\mathbf{r}} = F_xx + F_yy = (6.00)(3.00)\text{ N}\cdot\text{m} + (-2.00)(1.00)\text{ N}\cdot\text{m}$

$= \boxed{16.0\text{ J}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b) $\theta = \cos^{-1}\left(\dfrac{\vec{\mathbf{F}}\cdot\Delta\vec{\mathbf{r}}}{F\Delta r}\right)$

$$= \cos^{-1}\frac{16\ \text{N}\cdot\text{m}}{\sqrt{(6.00\ \text{N})^2+(-2.00\ \text{N})^2}\cdot\sqrt{(3.00\ \text{m})^2+(1.00\ \text{m})^2}}$$

$$= \boxed{36.9^\circ}$$

P6.10 We must first find the angle between the two vectors. It is:

$$\theta = (360^\circ - 132^\circ) - (118^\circ + 90.0^\circ) = 20.0^\circ$$

Then

$$\vec{\mathbf{F}}\cdot\vec{\mathbf{r}} = Fr\cos\theta = (32.8\ \text{N})(0.173\ \text{m})\cos 20.0^\circ$$

or $\vec{\mathbf{F}}\cdot\vec{\mathbf{r}} = 5.33\ \text{N}\cdot\text{m} = \boxed{5.33\ \text{J}}$

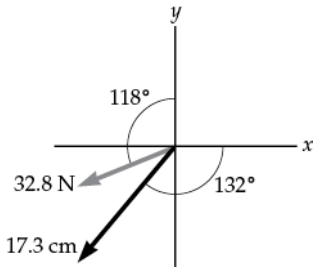

ANS. FIG. P6.10

P6.11 $\vec{\mathbf{A}} - \vec{\mathbf{B}} = \left(3.00\hat{\mathbf{i}} + \hat{\mathbf{j}} - \hat{\mathbf{k}}\right) - \left(-\hat{\mathbf{i}} + 2.00\hat{\mathbf{j}} + 5.00\hat{\mathbf{k}}\right) = 4.00\hat{\mathbf{i}} - \hat{\mathbf{j}} - 6.00\hat{\mathbf{k}}$

$$\vec{\mathbf{C}}\cdot\left(\vec{\mathbf{A}} - \vec{\mathbf{B}}\right) = \left(2.00\hat{\mathbf{j}} - 3.00\hat{\mathbf{k}}\right)\cdot\left(4.00\hat{\mathbf{i}} - \hat{\mathbf{j}} - 6.00\hat{\mathbf{k}}\right) = 0 + (-2.00) + (+18.0)$$

$$= \boxed{16.0}$$

P6.12 (a) $\vec{\mathbf{A}} = 3.00\hat{\mathbf{i}} - 2.00\hat{\mathbf{j}}$

$\vec{\mathbf{B}} = 4.00\hat{\mathbf{i}} - 4.00\hat{\mathbf{j}}$

$$\theta = \cos^{-1}\left(\frac{\vec{\mathbf{A}}\cdot\vec{\mathbf{B}}}{AB}\right) = \cos^{-1}\left(\frac{12.0 + 8.00}{\sqrt{13.0}\cdot\sqrt{32.0}}\right) = \boxed{11.3^\circ}$$

(b) $\vec{\mathbf{A}} = -2.00\hat{\mathbf{i}} + 4.00\hat{\mathbf{j}}$

$\vec{\mathbf{B}} = 3.00\hat{\mathbf{i}} - 4.00\hat{\mathbf{j}} + 2.00\hat{\mathbf{k}}$

$$\cos\theta = \left(\frac{\vec{\mathbf{A}}\cdot\vec{\mathbf{B}}}{AB}\right) = \frac{-6.00 - 16.0}{\sqrt{20.0}\cdot\sqrt{29.0}} \quad\rightarrow\quad \theta = \boxed{156^\circ}$$

(c) $\vec{\mathbf{A}} = \hat{\mathbf{i}} - 2.00\hat{\mathbf{j}} + 2.00\hat{\mathbf{k}}$

$\vec{\mathbf{B}} = 3.00\hat{\mathbf{j}} + 4.00\hat{\mathbf{k}}$

$$\theta = \cos^{-1}\left(\frac{\vec{\mathbf{A}}\cdot\vec{\mathbf{B}}}{AB}\right) = \cos^{-1}\left(\frac{-6.00 + 8.00}{\sqrt{9.00}\cdot\sqrt{25.0}}\right) = \boxed{82.3^\circ}$$

***P6.13** Let θ represent the angle between $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$. Turning by 25° makes the dot product larger, so the angle between $\vec{\mathbf{C}}$ and $\vec{\mathbf{B}}$ must be smaller. We call it $\theta - 25^\circ$. Then we have

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$5A \cos \theta = 30$ and $5A \cos (\theta - 25^\circ) = 35$

Then

$A \cos \theta = 6$ and $A (\cos\theta \cos 25^\circ + \sin\theta \sin 25^\circ) = 7$

Dividing,

$\cos 25^\circ + \tan \theta \sin 25^\circ = 7/6$

or $\tan\theta = (7/6 - \cos 25^\circ)/\sin 25^\circ = 0.616$

Which gives $\theta = 31.6^\circ$. Then the direction angle of A is $60^\circ - 31.6^\circ = 28.4^\circ$. Substituting back,

$A \cos 31.6^\circ = 6$ so $\vec{\mathbf{A}} = \boxed{7.05 \text{ m at } 28.4^\circ}$

Section 6.4 Work Done by a Varying Force

***P6.14** $W = \int_i^f F dx =$ area under curve from x_i to x_f

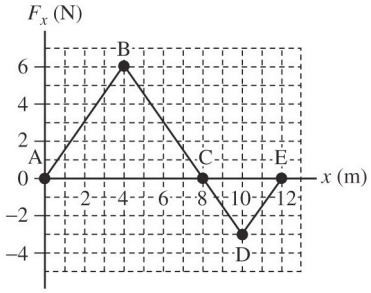

ANS. FIG. P6.14

(a) $x_i = 0$ and $x_f = 800$ m

$W_{0\to 8}$ = area of triangle ABC

$$= \left(\frac{1}{2}\right) \text{AC} \times \text{height},$$

$$W_{0\to 8} = \left(\frac{1}{2}\right) \times 8.00 \text{ m} \times 6.00 \text{ N}$$

$$= \boxed{24.0 \text{ J}}$$

(b) $x_i = 8.00$ m and $x_f = 10.0$ m

$$W_{8\to 10} = \text{area of } \Delta\text{CDE} = \left(\frac{1}{2}\right) \text{CE} \times \text{height},$$

$$W_{8\to 10} = \left(\frac{1}{2}\right) \times (2.00 \text{ m}) \times (-3.00 \text{ N}) = \boxed{-3.00 \text{ J}}$$

(c) $W_{0\to 10} = W_{0\to 8} + W_{0\to 10} = 24.0 + (-3.00) = \boxed{21.0 \text{ J}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

P6.15 We use the graphical representation of the definition of work. W equals the area under the force-displacement curve. This definition is still written $W = \int F_x dx$ but it is computed geometrically by identifying triangles and rectangles on the graph.

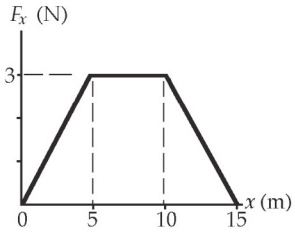

ANS. FIG. P6.15

(a) For the region $0 \le x \le 5.00$ m,

$$W = \frac{(3.00 \text{ N})(5.00 \text{ m})}{2} = \boxed{7.50 \text{ J}}$$

(b) For the region $5.00 \le x \le 10.0$, $W = (3.00 \text{ N})(5.00 \text{ m}) = \boxed{15.0 \text{ J}}$

(c) For the region $10.00 \le x \le 15.0$, $W = \frac{(3.00 \text{ N})(5.00 \text{ m})}{2} = \boxed{7.50 \text{ J}}$

(d) For the region $0 \le x \le 15.0$ $W = (7.50 + 7.50 + 15.0) \text{ J} = \boxed{30.0 \text{ J}}$

P6.16 (a) Spring constant is given by $F = kx$:

$$k = \frac{F}{x} = \frac{230 \text{ N}}{0.400 \text{ m}} = \boxed{575 \text{ N/m}}$$

(b) $\text{Work} = F_{\text{avg}} x = \left(\frac{230 \text{ N} - 0}{2} \right)(0.400 \text{ m}) = \boxed{46.0 \text{ J}}$

P6.17 When the load of mass $M = 4.00$ kg is hanging on the spring in equilibrium, the upward force exerted by the spring on the load is equal in magnitude to the downward force that the Earth exerts on the load, given by $w = Mg$. Then we can write Hooke's law as $Mg = +kx$. The spring constant, force constant, stiffness constant, or Hooke's-law constant of the spring is given by

$$k = \frac{F}{y} = \frac{Mg}{y} = \frac{(4.00 \text{ kg})(9.80 \text{ m/s}^2)}{2.50 \times 10^{-2} \text{ m}} = 1.57 \times 10^3 \text{ N/m}$$

(a) For the 1.50-kg mass,

$$y = \frac{mg}{k} = \frac{(1.50 \text{ kg})(9.80 \text{ m/s}^2)}{1.57 \times 10^3 \text{ N/m}} = 0.009\,38 \text{ m} = \boxed{0.938 \text{ cm}}$$

(b) $\text{Work} = \frac{1}{2} k y^2 = \frac{1}{2}(1.57 \times 10^3 \text{ N/m})(4.00 \times 10^{-2} \text{ m})^2 = \boxed{1.25 \text{ J}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

P6.18 (a) The radius to the object makes angle θ with the horizontal. Taking the x axis in the direction of motion tangent to the cylinder, the object's weight makes an angle θ with the $-x$ axis. Then,

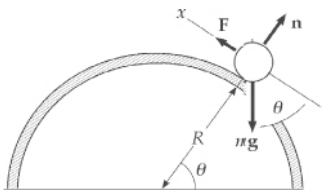

ANS. FIG. P6.18

$$\sum F_x = ma_x$$
$$F - mg\cos\theta = 0$$
$$F = \boxed{mg\cos\theta}$$

(b) $$W = \int_i^f \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$$

We use radian measure to express the next bit of displacement as $dr = Rd\theta$ in terms of the next bit of angle moved through:

$$W = \int_0^{\pi/2} mg\cos\theta R\, d\theta = mgR\sin\theta\Big|_0^{\pi/2} = mgR(1-0) = \boxed{mgR}$$

***P6.19** The same force makes both light springs stretch.

(a) The hanging mass moves down by

$$x = x_1 + x_2 = \frac{mg}{k_1} + \frac{mg}{k_2} = mg\left(\frac{1}{k_1} + \frac{1}{k_2}\right)$$
$$= (1.5\text{ kg})(9.8\text{ m/s}^2)\left(\frac{1}{1\,200\text{ N/m}} + \frac{1}{1\,800\text{ N/m}}\right)$$
$$= \boxed{2.04\times10^{-2}\text{ m}}$$

(b) We define the effective spring constant as

$$k = \frac{F}{x} = \frac{mg}{mg\left(1/k_1 + 1/k_2\right)} = \left(\frac{1}{k_1} + \frac{1}{k_2}\right)^{-1}$$
$$= \left(\frac{1}{1\,200\text{ N/m}} + \frac{1}{1\,800\text{ N/m}}\right)^{-1} = \boxed{720\text{ N/m}}$$

P6.20 (a) The force mg is the tension in each of the springs. The bottom of the upper (first) spring moves down by distance $x_1 = |F|/k_1 = mg/k_1$. The top of the second spring moves down by this distance, and the second spring also stretches by $x_2 = mg/k_2$. The bottom of the lower spring then moves down by distance

$$x_{\text{total}} = x_1 + x_2 = \frac{mg}{k_1} + \frac{mg}{k_2} = \boxed{mg\left(\frac{1}{k_1} + \frac{1}{k_2}\right)}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b) From the last equation we have

$$mg = \frac{x_1 + x_2}{\frac{1}{k_1} + \frac{1}{k_2}}$$

This is of the form

$$|F| = \left(\frac{1}{1/k_1 + 1/k_2}\right)(x_1 + x_2)$$

The downward displacement is opposite in direction to the upward force the springs exert on the load, so we may write $F = -k_{eff}\, x_{\text{total}}$, with the effective spring constant for the pair of springs given by

$$k_{eff} = \boxed{\frac{1}{1/k_1 + 1/k_2}}$$

P6.21 $\sum F_x = ma_x$: $kx = ma$

$$k = \frac{ma}{x}$$

$$= \frac{(4.70 \times 10^{-3}\ \text{kg})\ (0.800)\ (9.80\ \text{m/s}^2)}{0.500 \times 10^{-2}\text{m}}$$

$$= \boxed{7.37\ \text{N/m}}$$

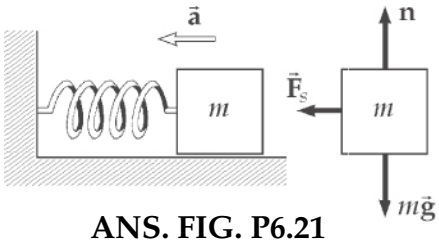

ANS. FIG. P6.21

***P6.22** $[k] = \left[\frac{F}{x}\right] = \frac{\text{N}}{\text{m}} = \frac{\text{kg}\cdot\text{m/s}^2}{\text{m}} = \boxed{\frac{\text{kg}}{\text{s}^2}}$

P6.23 (a) If the weight of the first tray stretches all four springs by a distance equal to the thickness of the tray, then the proportionality expressed by Hooke's law guarantees that each additional tray will have the same effect, so that the top surface of the top tray can always have the same elevation above the floor if springs with the right spring constant are used.

(b) The weight of a tray is $(0.580\ \text{kg})(9.8\ \text{m/s}^2) = 5.68\ \text{N}$. The force $\frac{1}{4}(5.68\ \text{N}) = 1.42\ \text{N}$ should stretch one spring by 0.450 cm, so its spring constant is

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$k = \frac{|F_s|}{x} = \frac{1.42 \text{ N}}{0.004\,5 \text{ m}} = \boxed{316 \text{ N/m}}$$

(c) $\boxed{\text{We did not need to know the length or width of the tray.}}$

P6.24 $F_x = (8x - 16)$ N

(a) See ANS. FIG. P6.24 to the right

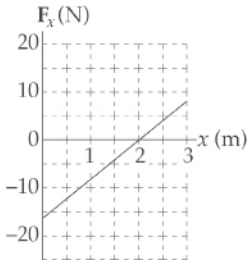

ANS. FIG. P6.24

(b) $$W_{\text{net}} = \frac{-(2.00 \text{ m})(16.0 \text{ N})}{2} + \frac{(1.00 \text{ m})(8.00 \text{ N})}{2}$$

$$= \boxed{-12.0 \text{ J}}$$

P6.25 $$W = \int_i^f \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = \int_0^{5 \text{ m}} \left(4x\hat{\mathbf{i}} + 3y\hat{\mathbf{j}}\right) \text{N} \cdot dx\hat{\mathbf{i}}$$

$$\int_0^{5 \text{ m}} (4 \text{ N/m}) x\,dx + 0 = (4 \text{ N/m}) \frac{x^2}{2}\bigg|_0^{5 \text{ m}} = \boxed{50.0 \text{ J}}$$

P6.26 The spring exerts on each block an outward force of magnitude

$$|F_s| = kx = (3.85 \text{ N/m})(0.08 \text{ m}) = 0.308 \text{ N}$$



ANS. FIG. P6.26

Take the $+x$ direction to the right. For the light block on the left, the vertical forces are given by $F_g = mg = (0.250 \text{ kg})(9.80 \text{ m/s}^2) = 2.45 \text{ N}$, $\sum F_y = 0$, $n - 2.45 \text{ N} = 0$, so $n = 2.45$ N. Similarly, for the heavier block, $n = F_g = (0.500 \text{ kg})(9.80 \text{ m/s}^2) = 4.90$ N.

(a) For the block on the left,

$$\sum F_x = ma_x, \; -0.308 \text{ N} = (0.250 \text{ kg})a$$

$$a = \boxed{-1.23 \text{ m/s}^2}$$

For the heavier block, $+0.308 \text{ N} = (0.500 \text{ kg})a$,

$$a = \boxed{0.616 \text{ m/s}^2}$$

(b) For the block on the left, $f_k = \mu_k n = 0.100(2.45 \text{ N}) = 0.245$ N.

$$\sum F_x = ma_x$$

$$-0.308 \text{ N} + 0.245 \text{ N} = (0.250 \text{ kg})a$$

$$a = \boxed{-0.252 \text{ m/s}^2 \text{ if the force of static friction is not too large}}.$$

For the block on the right, $f_k = \mu_k n = 0.490$ N. The maximum force

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

of static friction would be larger, so no motion would begin and the acceleration is $\boxed{\text{zero}}$.

(c) Left block: $f_k = 0.462(2.45\text{ N}) = 1.13\text{ N}$. The maximum static friction force would be larger, so the spring force would produce no motion of this block or of the right-hand block, which could feel even more friction force. For both, $a = \boxed{0}$.

P6.27 Compare an initial picture of the rolling car with a final picture with both springs compressed $K_i + \sum W = K_f$. Work by both springs changes the car's kinetic energy.

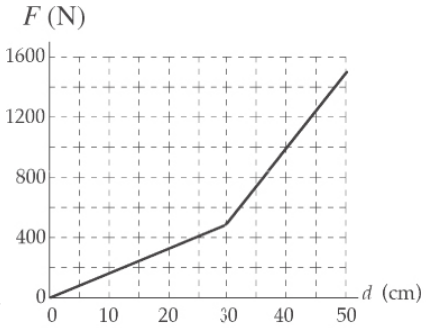

ANS. FIG. P6.27

$$K_i + \frac{1}{2}k_1\left(x_{1i}^2 - x_{1f}^2\right) + \frac{1}{2}k_2\left(x_{2i}^2 - x_{2f}^2\right) = K_f$$

$$\frac{1}{2}mv_i^2 + 0 - \frac{1}{2}(1\,600\text{ N/m})(0.500\text{ m})^2 + 0 - \frac{1}{2}(3\,400\text{ N/m})(0.200\text{ m})^2 = 0$$

$$\frac{1}{2}(6\,000\text{ kg})v_i^2 - 200\text{ J} - 68.0\text{ J} = 0$$

$$v_i = \sqrt{\frac{2(268\text{ J})}{6\,000\text{ kg}}} = \boxed{0.299\text{ m/s}}$$

P6.28 (a) $W = \int_i^f \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$

$$W = \int_0^{0.600\text{ m}} \left(15\,000\text{ N} + 10\,000x\text{ N/m} - 25\,000x^2\text{ N/m}^2\right)dx\cos 0°$$

$$W = 15\,000x + \frac{10\,000x^2}{2} - \frac{25\,000x^3}{3}\Bigg|_0^{0.600\text{ m}}$$

$$W = 9.00\text{ kJ} + 1.80\text{ kJ} - 1.80\text{ kJ} = \boxed{9.00\text{ kJ}}$$

(b) Similarly,

$$W = (15.0\text{ kN})(1.00\text{ m}) + \frac{(10.0\text{ kN/m})(1.00\text{ m})^2}{2} - \frac{\left(25.0\text{ kN/m}^2\right)(1.00\text{ m})^3}{3}$$

$$W = 11.67\text{ kJ} = \boxed{11.7\text{ kJ}}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(c) $\frac{11.7\text{ kJ} - 9.00\text{ kJ}}{9.00\text{ kJ}} \times 100\% = 29.6\%$

The work is greater by 29.6%.

***P6.29** In $F = -kx$, F refers to the size of the force that the spring exerts on each end. It pulls down on the doorframe in part (a) in just as real a sense as it pulls on the second person in part (b).

(a) Consider the upward force exerted by the bottom end of the spring, which undergoes a downward displacement that we count as negative:

$$k = -F/x = -(7.50\text{ kg})(9.80\text{ m/s}^2)/(-0.415\text{ m} + 0.350\text{ m})$$

$$= -73.5\text{ N}/(-0.065\text{ m}) = \boxed{1.13\text{ kN/m}}$$

(b) Consider the end of the spring on the right, which exerts a force to the left:

$$x = -F/k = -(-190\text{ N})/(1130\text{ N/m}) = 0.168\text{ m}$$

The length of the spring is then

$$0.35\text{ m} + 0.168\text{ m} = \boxed{0.518\text{ m} = 51.8\text{ cm}}$$

Section 6.5 Kinetic Energy and the Work-Kinetic Energy Theorem

***P6.30** (a) Since the applied force is horizontal, it is in the direction of the displacement giving $\theta = 0^\circ$. The work done by this force is then

$$W_{F_0} = (F_0\cos\theta)\Delta x = F_0(\cos 0^\circ)\Delta x = F_0(\Delta x)$$

and

$$F_0 = \frac{W_{F_0}}{\Delta x} = \frac{350\text{ J}}{12.0\text{ m}} = \boxed{29.2\text{ N}}$$

(b) If the applied force is greater than 29.2 N, the crate would accelerate in the direction of the force, so its

speed would increase with time.

(c) If the applied force is less than 29.2 N, the

crate would slow down and come to rest.

P6.31 $\vec{\mathbf{v}}_i = \left(6.00\hat{\mathbf{i}} - 1.00\hat{\mathbf{j}}\right)\text{ m/s}^2$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(a) $v_i = \sqrt{v_{ix}^2 + v_{iy}^2} = \sqrt{37.0}\ \text{m/s}$

$$K_i = \frac{1}{2}mv_i^2 = \frac{1}{2}(3.00\ \text{kg})\left(37.0\ \text{m}^2/\text{s}^2\right) = \boxed{55.5\ \text{J}}$$

(b) $\vec{\mathbf{v}}_f = 8.00\hat{\mathbf{i}} + 4.00\hat{\mathbf{j}}$

$$v_f^2 = \vec{\mathbf{v}}_f \cdot \vec{\mathbf{v}}_f = 64.0 + 16.0 = 80.0\ \text{m}^2/\text{s}^2$$

$$\Delta K = K_f - K_i = \frac{1}{2}m\left(v_f^2 - v_i^2\right) = \frac{3.00}{2}(80.0) - 55.5 = \boxed{64.5\ \text{J}}$$

P6.32 (a) $\Delta K = K_f - K_i = \frac{1}{2}mv_f^2 - 0 = \sum W =$ (area under curve from $x = 0$ to $x = 5.00$ m)

$$v_f = \sqrt{\frac{2(\text{area})}{m}} = \sqrt{\frac{2(7.50\ \text{J})}{4.00\ \text{kg}}} = \boxed{1.94\ \text{m/s}}$$

(b) $\Delta K = K_f - K_i = \frac{1}{2}mv_f^2 - 0 = \sum W =$ (area under curve from $x = 0$ to $x = 10.0$ m)

$$v_f = \sqrt{\frac{2(\text{area})}{m}} = \sqrt{\frac{2(22.5\ \text{J})}{4.00\ \text{kg}}} = \boxed{3.35\ \text{m/s}}$$

(c) $\Delta K = K_f - K_i = \frac{1}{2}mv_f^2 - 0 = \sum W =$ (area under curve from $x = 0$ to $x = 15.0$ m)

$$v_f = \sqrt{\frac{2(\text{area})}{m}} = \sqrt{\frac{2(30.0\ \text{J})}{4.00\ \text{kg}}} = \boxed{3.87\ \text{m/s}}$$

P6.33 (a) $K_A = \frac{1}{2}(0.600\ \text{kg})(2.00\ \text{m/s})^2 = \boxed{1.20\ \text{J}}$

(b) $\frac{1}{2}mv_B^2 = K_B$: $v_B = \sqrt{\frac{2K_B}{m}} = \sqrt{\frac{(2)(7.50\ \text{J})}{0.600\ \text{kg}}} = \boxed{5.00\ \text{m/s}}$

(c) $\sum W = \Delta K = K_B - K_A = \frac{1}{2}m\left(v_B^2 - v_A^2\right) = 7.50\ \text{J} - 1.20\ \text{J} = \boxed{6.30\ \text{J}}$

P6.34 (a) $v_f = 0.096\left(3.00 \times 10^8\ \text{m/s}\right) = 2.88 \times 10^7\ \text{m/s}$

$$K_f = \frac{1}{2}mv_f^2 = \frac{1}{2}\left(9.11 \times 10^{-31}\ \text{kg}\right)\left(2.88 \times 10^7\ \text{m/s}\right)^2 = \boxed{3.78 \times 10^{-16}\ \text{J}}$$

(b) $K_i + W = K_f : 0 + F\Delta r\cos\theta = K_f$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$F(0.028\text{ m})\cos 0° = 3.78\times10^{-16}\text{ J}$$

$$F = \boxed{1.35\times10^{-14}\text{ N}}$$

(c) $\sum F = ma$: $\quad a = \dfrac{\sum F}{m} = \dfrac{1.35\times10^{-14}\text{ N}}{9.11\times10^{-31}\text{ kg}} = \boxed{1.48\times10^{+16}\text{ m/s}^2}$

(d) $v_{xf} = v_{xi} + a_x t$: $\quad 2.88\times10^{7}\text{ m/s} = 0 + \left(1.48\times10^{16}\text{ m/s}^2\right)t$

$$t = \boxed{1.94\times10^{-9}\text{ s}}$$

P6.35 Consider the work done on the pile driver from the time it starts from rest until it comes to rest at the end of the fall. Let d = 5.00 m represent the distance over which the driver falls freely, and h = 0.12 the distance it moves the piling.

$$\sum W = \Delta K: \quad W_{\text{gravity}} + W_{\text{beam}} = \frac{1}{2}mv_f^2 - \frac{1}{2}mv_i^2$$

so $\quad (mg)(h+d)\cos 0° + \left(\bar{F}\right)(d)\cos 180° = 0 - 0$

Thus,

$$\bar{F} = \frac{(mg)(h+d)}{d} = \frac{(2\,100\text{ kg})\left(9.80\text{ m/s}^2\right)(5.12\text{ m})}{0.120\text{ m}} = \boxed{8.78\times10^{5}\text{ N}}$$

The force on the pile driver is $\boxed{\text{upward.}}$

***P6.36** (a) As the bullet moves the hero's hand, work is done on the bullet to decrease its kinetic energy. The average force is opposite to the displacement of the bullet:

$$W_{\text{net}} = F_{\text{avg}}\Delta x\cos 180° = -F_{\text{avg}}\Delta x = \Delta K$$

$$F_{\text{avg}} = \frac{\Delta K}{-\Delta x} = \frac{0 - \frac{1}{2}\left(7.80\times10^{-3}\text{ kg}\right)(575\text{ m/s})^2}{-0.055\ 0\text{ m}}$$

$$\boxed{F_{\text{avg}} = 2.34\ \times\ 10^{4}\text{ N, opposite to the direction of motion}}$$

(b) If the average force is constant, the bullet will have a constant acceleration and its average velocity while stopping is $\bar{v} = (v_f + v_i)/2$. The time required to stop is then

$$\Delta t = \frac{\Delta x}{\bar{v}} = \frac{2(\Delta x)}{v_f + v_i} = \frac{2(5.50\times10^{-2}\text{m})}{0 + 575\text{ m/s}} = \boxed{1.91\times10^{-4}\text{s}}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

***P6.37** (a) $K = \frac{1}{2}mv^2 = \frac{1}{2}m(v_x^{\,2} + v_y^{\,2})$

$$= \frac{1}{2}(5.75\text{ kg})[(5.00\text{ m/s})^2 + (-3.00\text{ m/s})^2] = \boxed{97.8\text{ J}}$$

(b) We know $F_x = ma_x$ and $F_y = ma_y$. At $t = 0$, $x_i = y_i = 0$, and $v_{xi} = 5.00$ m/s, $v_{yi} = -3.00$ m/s; at $t = 2.00$ s, $x_f = 8.50$ m, $y_f = 5.00$ m.

$$x_f = x_i + v_{xi}t + \frac{1}{2}a_x t^2$$

$$a_x = \frac{2(x_f - x_i - v_{xi}t)}{t^2} = \frac{2[8.50\text{ m} - 0 - (5.00\text{ m/s})(2.00\text{ s})]}{(2.00\text{ s})^2}$$

$$= -0.75\text{ m/s}^2$$

$$y_f = y_i + v_{yi}t + \frac{1}{2}a_y t^2$$

$$a_y = \frac{2(y_f - y_i - v_{yi}t)}{t^2} = \frac{2[5.00\text{ m} - 0 - (-3.00\text{ m/s})(2.00\text{ s})]}{(2.00\text{ s})^2}$$

$$= 5.50\text{ m/s}^2$$

$$F_x = ma_x = (5.75\text{ kg})(-0.75\text{ m/s}^2) = -4.31\text{ N}$$

$$F_y = ma_y = (5.75\text{ kg})(5.50\text{ m/s}^2) = 31.6\text{ N}$$

$$\boxed{\vec{\mathbf{F}} = \left(-4.31\hat{\mathbf{i}} + 31.6\hat{\mathbf{j}}\right)\text{ N}}$$

(c) We can obtain the particle's speed at $t = 2.00$ s from the particle under constant acceleration model, or from the nonisolated system model. From the former,

$$v_{xf} = v_{xi} + a_x t = (5.00\text{ m/s}) + \left(-0.75\text{ m/s}^2\right)(2.00\text{ s}) = 3.50\text{ m/s}$$

$$v_{xf} = v_{yi} + a_y t = (-3.00\text{ m/s}) + \left(5.50\text{ m/s}^2\right)(2.00\text{ s}) = 8.00\text{ m/s}$$

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(3.50\text{ m/s})^2 + (8.00\text{ m/s})^2} = \boxed{8.73\text{ m/s}}$$

From the nonisolated system model,

$$\sum W = \Delta K: \quad W_{\text{ext}} = \frac{1}{2}mv_f^2 - \frac{1}{2}mv_i^2$$

The work done by the force is given by

$$W_{\text{ext}} = \vec{\mathbf{F}} \cdot \Delta\vec{\mathbf{r}} = F_x \Delta r_x + F_y \Delta r_y$$
$$= (-4.31\text{ N})(8.50\text{ m}) + (31.6\text{ N})(5.00\text{ m}) = 121\text{ J}$$

then,

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$\frac{1}{2}mv_f^2 = W_{\text{ext}} + \frac{1}{2}mv_i^2 = 121\text{ J} + 97.8\text{ J} = 219\text{ J}$$

which gives

$$v_f = \sqrt{\frac{2(219\text{ J})}{5.75\text{ kg}}} = \boxed{8.73\text{ m/s}}$$

P6.38 (a) $K_i + \sum W = K_f = \frac{1}{2}mv_f^2$

$$0 + \sum W = \frac{1}{2}(15.0\times10^{-3}\text{ kg})(780\text{ m/s})^2 = \boxed{4.56\text{ kJ}}$$

(b) As shown in part (a), the net work performed on the bullet is $\boxed{4.56\text{ kJ.}}$

(c) $F = \dfrac{W}{\Delta r\cos\theta} = \dfrac{4.56\times10^3\text{ J}}{(0.720\text{ m})\cos0°} = \boxed{6.34\text{ kN}}$

(d) $a = \dfrac{v_f^2 - v_i^2}{2x_f} = \dfrac{(780\text{ m/s})^2 - 0}{2(0.720\text{ m})} = \boxed{422\text{ km/s}^2}$

(e) $\sum F = ma = (15\times10^{-3}\text{ kg})(422\times10^3\text{ m/s}^2) = \boxed{6.34\text{ kN}}$

(f) $\boxed{\text{The forces are the same. The two theories agree.}}$

Section 6.6 Potential Energy of a System

***P6.39** Use $U = mgy$, where y is measured relative to a reference level. Here, we measure y to be relative to the top edge of the well, where we take $y = 0$.

(a) $y = 1.3$ m: $U = mgy = (0.20\text{ kg})(9.80\text{ m/s}^2)(1.3\text{ m}) = \boxed{+2.5\text{ J}}$

(b) $y = -5.0$ m: $U = mgy = (0.20\text{ kg})(9.80\text{ m/s}^2)(-5.0\text{ m}) = \boxed{-9.8\text{ J}}$

(c) $\Delta U = U_f - U_i = (-9.8\text{ J}) - (2.5\text{ J}) = -12.3 = \boxed{-12\text{ J}}$

P6.40 (a) We take the zero configuration of system potential energy with the child at the lowest point of the arc. When the swing is held horizontal initially, the initial position is 2.00 m above the zero level. Thus,

$$U_g = mgy = (400\text{ N})(2.00\text{ m}) = \boxed{800\text{ J}}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b) From the sketch, we see that at an angle of 30.0° the child is at a vertical height of (2.00 m)(1 – cos 30.0°) above the lowest point of the arc. Thus,

$$U_g = mgy$$
$$= (400\text{ N})(2.00\text{ m}) \times (1 - \cos 30.0°)$$
$$= \boxed{107\text{ J}}$$

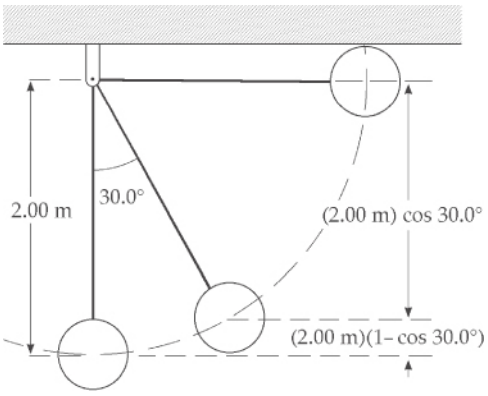

ANS. FIG. P6.40

(c) The zero level has been selected at the lowest point of the arc. Therefore, $\boxed{U_g = 0}$ at this location.

P6.41 (a) With our choice for the zero level for potential energy of the car-Earth system when the car is at point Ⓑ,

$$\boxed{U_B = 0}$$

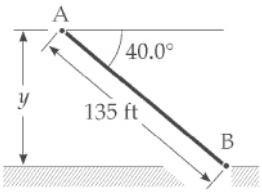

ANS. FIG. P6.41

When the car is at point Ⓐ, the potential energy of the car-Earth system is given by

$$U_A = mgy$$

where y is the vertical height above zero level. With 135 ft = 41.1 m, this height is found as:

$$y = (41.1\text{ m})\sin 40.0° = 26.4\text{ m}$$

Thus,

$$U_A = (1\,000\text{ kg})\left(9.80\text{ m/s}^2\right)(26.4\text{ m}) = \boxed{2.59 \times 10^5\text{ J}}$$

The change in potential energy of the car-Earth system as the car moves from Ⓐ to Ⓑ is

$$U_B - U_A = 0 - 2.59 \times 10^5\text{ J} = \boxed{-2.59 \times 10^5\text{ J}}$$

(b) With our choice of the zero configuration for the potential energy of the car-Earth system when the car is at point Ⓐ, we have $\boxed{U_A = 0}$. The potential energy of the system when the car is at point Ⓑ is given by $U_B = mgy$, where y is the vertical distance of point Ⓑ below point Ⓐ. In part (a), we found the magnitude of this distance to be 26.5 m. Because this distance is now below the zero reference level, it is a negative number.

Thus,

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$U_B = (1\,000\text{ kg})\left(9.80\text{ m/s}^2\right)(-26.5\text{ m}) = \boxed{-2.59\times10^5\text{ J}}$$

The change in potential energy when the car moves from Ⓐ to Ⓑ is

$$U_B - U_A = -2.59\times10^5\text{ J} - 0 = \boxed{-2.59\times10^5\text{ J}}$$

Section 6.7 Conservative and Nonconservative Forces

***P6.42** The gravitational force is downward:

$$F_g = mg = (4.00\text{ kg})(9.80\text{ m/s}^2) = 39.2\text{ N}$$

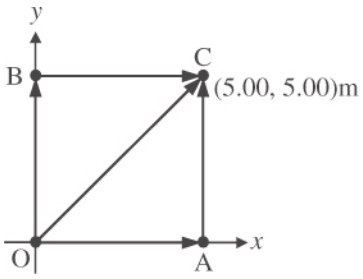

ANS. FIG. P6.42

(a) Work along OAC = work along OA + work along AC

$$= F_g(\text{OA})\cos 90.0° + F_g(\text{AC})\cos 180°$$
$$= (39.2\text{ N})(5.00\text{ m})(0) + (39.2\text{ N})(5.00\text{ m})(-1)$$
$$= \boxed{-196\text{ J}}$$

(b) W along OBC = W along OB + W along BC

$$= (39.2\text{ N})(5.00\text{ m})\cos 180° + (39.2\text{ N})(5.00\text{ m})\cos 90.0°$$
$$= \boxed{-196\text{ J}}$$

(c) Work along OC = $F_g(\text{OC})\cos 135°$

$$= (39.2\text{ N})\left(5.00\times\sqrt{2}\text{ m}\right)\left(-\frac{1}{\sqrt{2}}\right) = \boxed{-196\text{ J}}$$

(d) The results should all be the same, since the gravitational force is conservative.

P6.43 In the following integrals, remember that

$$\hat{\mathbf{i}}\cdot\hat{\mathbf{i}} = \hat{\mathbf{j}}\cdot\hat{\mathbf{j}} = 1 \quad \text{and} \quad \hat{\mathbf{i}}\cdot\hat{\mathbf{j}} = 0$$

(a) The work done on the particle in its first section of motion is

$$W_{OA} = \int_0^{5.00\text{ m}} dx\hat{\mathbf{i}}\cdot\left(2y\hat{\mathbf{i}} + x^2\hat{\mathbf{j}}\right) = \int_0^{5.00\text{ m}} 2y\,dx$$

and since along this path, $y = 0$, $W_{OA} = 0$.

In the next part of its path

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$W_{AC} = \int_0^{5.00\text{ m}} dy\hat{\mathbf{j}} \cdot \left(2y\hat{\mathbf{i}} + x^2\hat{\mathbf{j}}\right) = \int_0^{5.00\text{ m}} x^2\, dy$$

For $x = 5.00$ m, $W_{AC} = 125$ J

and $W_{OAC} = 0 + 125 = \boxed{125\text{ J}}$.

(b) Following the same steps,

$$W_{OB} = \int_0^{5.00\text{ m}} dy\hat{\mathbf{j}} \cdot \left(2y\hat{\mathbf{i}} + x^2\hat{\mathbf{j}}\right) = \int_0^{5.00\text{ m}} x^2\, dy$$

since along this path, $x = 0$, $W_{OB} = 0$.

$$W_{BC} = \int_0^{5.00\text{ m}} dx\hat{\mathbf{i}} \cdot \left(2y\hat{\mathbf{i}} + x^2\hat{\mathbf{j}}\right) = \int_0^{5.00\text{ m}} 2y\, dx$$

since $y = 5.00$ m, $W_{BC} = 50.0$ J.

$$W_{OAC} = 0 + 125 = \boxed{125\text{ J}}$$

(c) $W_{OC} = \int \left(dx\hat{\mathbf{i}} + dy\hat{\mathbf{j}}\right) \cdot \left(2y\hat{\mathbf{i}} + x^2\hat{\mathbf{j}}\right) = \int \left(2y dx + x^2 dy\right)$

Since $x = y$ along OC, $W_{OC} = \int_0^{5.00\text{ m}} \left(2x + x^2\right) dx = \boxed{66.7\text{ J}}$

(d) $\boxed{F \text{ is nonconservative.}}$

(e) The work done on the particle depends on the path followed by the particle.

P6.44 (a) $W = \int \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$ and if the force is constant, this can be written as

$W = \vec{\mathbf{F}} \cdot \int d\vec{\mathbf{r}} = \boxed{\vec{\mathbf{F}} \cdot \left(\vec{\mathbf{r}}_f - \vec{\mathbf{r}}_i\right)}$, which depends only on the end points,

and not on the path.

(b) $W = \int \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = \int \left(3\hat{\mathbf{i}} + 4\hat{\mathbf{j}}\right) \cdot \left(dx\hat{\mathbf{i}} + dy\hat{\mathbf{j}}\right)$

$$= (3.00\text{ N}) \int_0^{5.00\text{ m}} dx + (4.00\text{ N}) \int_0^{5.00\text{ m}} dy$$

$$W = (3.00\text{ N})x\Big|_0^{5.00\text{ m}} + (4.00\text{ N})y\Big|_0^{5.00\text{ m}} = 15.0\text{ J} + 20.0\text{ J} = \boxed{35.0\text{ J}}$$

The same calculation applies for all paths.

***P6.45** Along each step of motion, to overcome friction you must push with a force of 3.00 N in the direction of travel along the path, so in the expression for work, $\cos\theta = \cos 0° = 1$.

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(a) $W = (3\text{ N})(5\text{ m})(1) + (3\text{ N})(5\text{ m})(1) = \boxed{30.0\text{ J}}$

(b) The distance CO is $(5^2 + 5^2)^{1/2}$ m = 7.07 m

W = (3 N)(5 m)(1) + (3 N)(5 m)(1) + (3 N)(7.07 m)(1) = $\boxed{51.2\text{ J}}$

(c) W = (3 N)(7.07 m)(1) + (3 N)(7.07 m)(1) = $\boxed{42.4\text{ J}}$

(d) $\boxed{\text{Friction is a nonconservative force.}}$

Section 6.8 Relationship Between Conservative Forces and Potential Energy

P6.46 We use the relation of force to potential energy as the force is the negative derivative of the potential energy with respect to distance:

$$U(r) = \frac{A}{r}$$

$F_r = -\dfrac{\partial U}{\partial r} = -\dfrac{d}{dr}\left(\dfrac{A}{r}\right) = \boxed{\dfrac{A}{r^2}}$. If A is positive, the positive value of radial force indicates a force of repulsion.

P6.47 (a) For a particle moving along the x axis, the definition of work by a variable force is

$$W_F = \int_{x_i}^{x_f} F_x dx$$

Here $F_x = (2x + 4)$ N, $x_i = 1.00$ m, and $x_f = 5.00$ m.

So

$$W_F = \int_{1.00\text{ m}}^{5.00\text{ m}} (2x + 4)dx\ \text{N}\cdot\text{m} = x^2 + 4x\Big]_{1.00\text{ m}}^{5.00\text{ m}}\ \text{N}\cdot\text{m}$$
$$= \left(5^2 + 20 - 1 - 4\right)\text{ J} = \boxed{40.0\text{ J}}$$

(b) The change in potential energy of the system is the negative of the internal work done by the conservative force on the particle:
$\Delta U = -W_{\text{int}} = \boxed{-40.0\text{ J}}$

(c) $\Delta K = K_f - \dfrac{mv_1^2}{2} \quad \rightarrow \quad K_f = \Delta K + \dfrac{mv_1^2}{2} = \boxed{62.5\text{ J}}$

P6.48 $F_x = -\dfrac{\partial U}{\partial x} = -\dfrac{\partial\left(3x^3y - 7x\right)}{\partial x} = -\left(9x^2y - 7\right) = 7 - 9x^2y$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$F_y = -\frac{\partial U}{\partial y} = -\frac{\partial\left(3x^3y - 7x\right)}{\partial y} = -\left(3x^3 - 0\right) = -3x^3$$

Thus, the force acting at the point (x, y) is

$$\vec{\mathbf{F}} = F_x\hat{\mathbf{i}} + F_y\hat{\mathbf{j}} = \boxed{\left(7 - 9x^2y\right)\hat{\mathbf{i}} - 3x^3\hat{\mathbf{j}}}$$

***P6.49** We need to be very careful in identifying internal and external work on the book-Earth system. The first 20.0 J, done by the librarian on the system, is external work, so the system now contains an additional 20.0 J compared to the initial configuration. When the book falls and the system returns to the initial configuration, the 20.0 J of work done by the gravitational force from the Earth is *internal* work. This work only transforms the gravitational potential energy of the system to kinetic energy. It does *not* add more energy to the system. Therefore, the book hits the ground with 20.0 J of kinetic energy. The book-Earth system now has zero gravitational potential energy, for a total energy of 20.0 J, which is the energy put into the system by the librarian.

Section 6.9 Potential Energy for Gravitational and Electric Forces

P6.50 $U = -G\dfrac{Mm}{r}$ and $g = \dfrac{GM_E}{R_E^2}$ so that

$$\Delta U = -GMm\left(\frac{1}{3R_E} - \frac{1}{R_E}\right) = \frac{2}{3}mgR_E$$

$$\Delta U = \frac{2}{3}(1000\text{ kg})\left(9.80\text{ m/s}^2\right)\left(6.37\times10^6\text{ m}\right) = \boxed{4.17\times10^{10}\text{ J}}$$

P6.51 (a) $U = -\dfrac{GM_Em}{r}$

$$= -\frac{\left(6.67\times10^{-11}\text{ N}\cdot\text{m}^2/\text{kg}^2\right)\left(5.98\times10^{24}\text{ kg}\right)(100\text{ kg})}{(6.37+2.00)\times10^6\text{ m}}$$

$$= \boxed{-4.77\times10^9\text{ J}}$$

(b), (c) Planet and satellite exert forces of equal magnitude on each other, directed downward on the satellite and upward on the planet.

$$F = \frac{GM_Em}{r^2}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$= \frac{(6.67\times10^{-11}\ \text{N}\cdot\text{m}^2/\text{kg}^2)(5.98\times10^{24}\ \text{kg})(100\ \text{kg})}{(8.37\times10^{6}\ \text{m})^2}$$

$$= \boxed{569\ \text{N}}$$

P6.52 (a) $U_{\text{Tot}} = U_{12} + U_{13} + U_{23} = 3U_{12} = 3\left(-\frac{Gm_1m_2}{r_{12}}\right)$

$$U_{\text{Tot}} = -\frac{3(6.67\times10^{-11}\ \text{N}\cdot\text{m}^2/\text{kg}^2)(5.00\times10^{-3}\ \text{kg})^2}{0.300\ \text{m}}$$

$$= \boxed{-1.67\times10^{-14}\ \text{J}}$$

(b) $\boxed{\text{At the center}}$ of the equilateral triangle

P6.53 The height attained is not small compared to the radius of the Earth, so $U = mgy$ does not apply; $U = -\frac{GM_1M_2}{r}$ does. From launch to apogee at height h, conservation of energy gives

$$K_i + U_i + \Delta E_{\text{mech}} = K_f + U_f$$

$$\frac{1}{2}M_p v_i^2 - \frac{GM_EM_p}{R_E} + 0 = 0 - \frac{GM_EM_p}{R_E + h}$$

$$\frac{1}{2}(10.0\times10^{3}\ \text{m/s})^2 - (6.67\times10^{-11}\ \text{N}\cdot\text{m}^2/\text{kg}^2)\left(\frac{5.98\times10^{24}\ \text{kg}}{6.37\times10^{6}\ \text{m}}\right)$$

$$= -(6.67\times10^{-11}\ \text{N}\cdot\text{m}^2/\text{kg}^2)\left(\frac{5.98\times10^{24}\ \text{kg}}{6.37\times10^{6}\ \text{m} + h}\right)$$

$$(5.00\times10^{7}\ \text{m}^2/\text{s}^2) - (6.26\times10^{7}\ \text{m}^2/\text{s}^2) = \frac{-3.99\times10^{14}\ \text{m}^3/\text{s}^2}{6.37\times10^{6}\ \text{m} + h}$$

$$6.37\times10^{6}\ \text{m} + h = \frac{3.99\times10^{14}\ \text{m}^3/\text{s}^2}{1.26\times10^{7}\ \text{m}^2/\text{s}^2} = 3.16\times10^{7}\ \text{m}$$

$$\boxed{h = 2.52\times10^{7}\ \text{m}}$$

Section 6.10 Energy Diagrams and Equilibrium of a System

P6.54 (a) $\boxed{F_x \text{ is zero at points A, C, and E; } F_x \text{ is positive at point B and negative at point D.}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b) A and E are unstable, and C is stable.

(c) The figure on the right shows the curve for F_x vs. x for this problem.

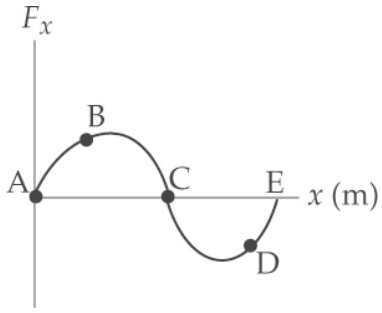

ANS. FIG. P6.54

***P6.55** The figure below shows the three equilibrium configurations for a right circular cone.

stable unstable neutral

ANS. FIG. P6.55

Section 6.11 Energy Diagrams and Equilibrium of a System

***P6.56** (a) $$\frac{P}{\text{area}} = \frac{\text{energy}}{\Delta t \cdot \text{area}} = \frac{600 \times 10^3 \text{ Wh}}{(30 \text{ d})(13.0 \text{ m})(9.50 \text{ m})}\left(\frac{1 \text{ d}}{24 \text{ h}}\right) = \boxed{6.75 \text{ W/m}^2}$$

(b) The car uses gasoline at the rate of $(55 \text{ mi/h})\left(\frac{\text{gal}}{25 \text{ mi}}\right)$. Its rate of energy conversion is

$$P = 44.0 \times 10^6 \text{ J/kg}\left(\frac{2.54 \text{ kg}}{1 \text{ gal}}\right)(55 \text{ mi/h})\left(\frac{\text{gal}}{25 \text{ mi}}\right)\left(\frac{1 \text{ h}}{3\,600 \text{ s}}\right)$$

$$= 6.83 \times 10^4 \text{ W}$$

Its power-per-footprint-area is

$$\frac{P}{\text{area}} = \frac{6.83 \times 10^4 \text{ W}}{(2.10 \text{ m})(4.90 \text{ m})} = \boxed{6.64 \times 10^3 \text{ W/m}^2}$$

(c) A powerful automobile that is running on sunlight would have to carry on its roof a solar panel huge compared with the size of the car.

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(d) Agriculture and forestry for food and fuels, space heating of large and small buildings, water heating, and heating for drying and many other processes are current and potential applications of solar energy.

P6.57 The energy per mass values are:

gasoline: 44 MJ/kg

hydrogen: 142 MJ/kg, larger by 142/44 = 3.2 times

hay: 17 MJ/kg, smaller than gasoline by 44/17 = 2.6 times

battery: $$\frac{\text{energy}}{\text{mass}} = \frac{P\Delta t}{m} = \frac{1\,200\ \text{W}(3\,600\ \text{s})}{16\ \text{kg}} = 0.27\ \text{MJ/kg},$$

smaller than hay by 17/0.27 = 63 times.

Thus in the order requested, the energy densities are

0.27 MJ/kg for a battery
17 MJ/kg for hay is 63 times larger
44 MJ/kg for gasoline is 2.6 times larger still
142 MJ/kg for hydrogen is 3.2 times larger still

Additional Problems

P6.58 The work done by the applied force is

$$W = \int_i^f F_{\text{applied}}\,dx = \int_0^{x_{\max}} -\left[-\left(k_1 x + k_2 x^2\right)\right]dx$$

$$= \int_0^{x_{\max}} k_1 x\,dx + \int_0^{x_{\max}} k_2 x^2 dx = k_1 \frac{x^2}{2}\bigg|_0^{x_{\max}} + k_2 \frac{x^3}{3}\bigg|_0^{x_{\max}}$$

$$= \boxed{k_1 \frac{x_{\max}^2}{2} + k_2 \frac{x_{\max}^3}{3}}$$

P6.59 At start, $\vec{\mathbf{v}} = (40.0\ \text{m/s})\cos 30.0°\,\hat{\mathbf{i}} + (40.0\ \text{m/s})\sin 30.0°\,\hat{\mathbf{j}}$

At apex, $\vec{\mathbf{v}} = (40.0\ \text{m/s})\cos 30.0°\,\hat{\mathbf{i}} + 0\hat{\mathbf{j}} = (34.6\ \text{m/s})\hat{\mathbf{i}}$

$$K = \frac{1}{2}mv^2 = \frac{1}{2}(0.150\ \text{kg})(34.6\ \text{m/s})^2 = \boxed{90.0\ \text{J}}$$

P6.60 Apply the work-energy theorem to the ball. The spring is initially compressed by $x_{\text{sp},i} = d = 5.00$ cm. After the ball is released from rest,

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

the spring pushes the ball up the incline the distance d, doing positive work on the ball, and gravity does negative work on the ball as it travels up the incline a distance Δx from its starting point. Solve for Δx.

$$K_i + W_s + W_g = K_f$$

$$\frac{1}{2}mv_i^2 + \left(\frac{1}{2}kx_{\text{sp},i}^2 - \frac{1}{2}kx_{\text{sp},f}^2\right) - mg\Delta x \sin\theta = \frac{1}{2}mv_f^2$$

$$0 + \left(\frac{1}{2}kd^2 - 0\right) - mg\Delta x \sin 10.0° = 0$$

$$\Delta x = \frac{kd^2}{2mg\sin 10.0°} = \frac{(1.20\text{ N/cm})(5.00\text{ cm})(0.0500\text{ m})}{2(0.100\text{ kg})\left(9.80\text{ m/s}^2\right)\sin 10.0°} = 0.881\text{ m}$$

Thus, the ball travels up the incline a distance of 0.881 m after it is released.

Applying the work-kinetic energy theorem to the ball, one finds that it momentarily comes to rest at a distance up the incline of only 0.881 m. This distance is much smaller than the height of a professional basketball player, so the ball will not reach the upper end of the incline to be put into play in the machine. The ball will simply stop momentarily and roll back to the spring; not an exciting entertainment for any casino visitor!

***P6.61** The component of the weight force parallel to the incline, $mg\sin\theta$, accelerates the block down the incline through a distance d until it encounters the spring, after which the spring force, pushing up the incline, opposes the weight force and slows the block through a distance x until the block eventually is brought to a momentary stop. The weight force does positive work on the block as it slides down the incline through total distance $(d + x)$, and the spring force does negative work on the block as it slides through distance x. The normal force does no work. Applying the work-energy theorem,

$$K_i + W_g + W_s = K_f$$

$$\frac{1}{2}mv_i^2 + mg\sin\theta(d+x) + \left(\frac{1}{2}kx_{\text{sp},i}^2 - \frac{1}{2}kx_{\text{sp},f}^2\right) = \frac{1}{2}mv_f^2$$

$$\frac{1}{2}mv^2 + mg\sin\theta(d+x) + \left(0 - \frac{1}{2}kx^2\right) = 0$$

Dividing by m, we have

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$\frac{1}{2}v^2 + g\sin\theta(d+x) - \frac{k}{2m}x^2 = 0 \quad \rightarrow$$
$$\frac{k}{2m}x^2 - (g\sin\theta)x - \left[\frac{v^2}{2} + (g\sin\theta)d\right] = 0$$

Solving for x, we have

$$x = \frac{g\sin\theta \pm \sqrt{(g\sin\theta)^2 - 4\left(\frac{k}{2m}\right)\left[-\left(\frac{v^2}{2} + (g\sin\theta)d\right)\right]}}{2\left(\frac{k}{2m}\right)}$$

$$x = \frac{g\sin\theta \pm \sqrt{(g\sin\theta)^2 + \left(\frac{k}{m}\right)\left[v^2 + 2(g\sin\theta)d\right]}}{k/m}$$

Because distance x must be positive,

$$x = \frac{g\sin\theta + \sqrt{(g\sin\theta)^2 + \left(\frac{k}{m}\right)\left[v^2 + 2(g\sin\theta)d\right]}}{k/m}$$

For $v = 0.750$ m/s, $k = 500$ N/m, $m = 2.50$ kg, $\theta = 20.0°$, and $g = 9.80$ m/s^2, we have $g\sin\theta = (9.80\ \text{m/s}^2)\sin 20.0° = 3.35\ \text{m/s}^2$ and $k/m = (500\ \text{N/m})/(2.50\ \text{kg}) = 200\ \text{N/m}\cdot\text{kg}$. Suppressing units, we have

$$x = \frac{3.35 + \sqrt{(3.35)^2 + (200)\left[(0.750)^2 + 2(3.35)(0.300)\right]}}{200} = \boxed{0.131\ \text{m}}$$

***P6.62** The component of the weight force parallel to the incline, $mg\sin\theta$, accelerates the block down the incline through a distance d until it encounters the spring, after which the spring force, pushing up the incline, opposes the weight force and slows the block through a distance x until the block eventually is brought to a momentary stop. The weight force does positive work on the block as it slides down the incline through total distance $(d + x)$, and the spring force does negative work on the block as it slides through distance x. The normal force does no work.

Applying the work-energy theorem,

$$K_i + W_g + W_s = K_f$$
$$\frac{1}{2}mv_i^2 + mg\sin\theta(d+x) + \left(\frac{1}{2}kx_{\text{sp},i}^2 - \frac{1}{2}kx_{\text{sp},f}^2\right) = \frac{1}{2}mv_f^2$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$\frac{1}{2}mv^2 + mg\sin\theta(d+x) + \left(0 - \frac{1}{2}kx^2\right) = 0$$

Dividing by m, we have

$$\frac{1}{2}v^2 + g\sin\theta(d+x) - \frac{k}{2m}x^2 = 0 \quad \rightarrow$$

$$\frac{k}{2m}x^2 - (g\sin\theta)x - \left[\frac{v^2}{2} + (g\sin\theta)d\right] = 0$$

Solving for x, we have

$$x = \frac{g\sin\theta \pm \sqrt{(g\sin\theta)^2 - 4\left(\frac{k}{2m}\right)\left[-\left(v^2/2 + (g\sin\theta)d\right)\right]}}{2\left(\frac{k}{2m}\right)}$$

$$x = \frac{g\sin\theta \pm \sqrt{(g\sin\theta)^2 + \left(\frac{k}{m}\right)\left[v^2 + 2(g\sin\theta)d\right]}}{k/m}$$

Because distance x must be positive,

$$\boxed{x = \frac{g\sin\theta + \sqrt{(g\sin\theta)^2 + \left(\frac{k}{m}\right)\left[v^2 + 2(g\sin\theta)d\right]}}{k/m}}$$

***P6.63** (a) The potential energy of the system at point x is given by 5 plus the negative of the work the force does as a particle feeling the force is carried from $x = 0$ to location x.

$$dU = -F\,dx$$

$$\int_5^U dU = -\int_0^x 8e^{-2x}\,dx$$

$$U - 5 = -\left(\frac{8}{[-2]}\right)\int_0^x e^{-2x}(-2\,dx)$$

$$U = 5 - \left(\frac{8}{[-2]}\right)e^{-2x}\Big|_0^x = 5 + 4e^{-2x} - 4\cdot 1 = \boxed{1 + 4e^{-2x}}$$

(b) The force must be conservative because the work the force does on the object on which it acts depends only on the original and final positions of the object, not on the path between them. There is a uniquely defined potential energy for the associated force.

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

P6.64 (a) $\vec{\mathbf{F}} = -\dfrac{d}{dx}\left(-x^3 + 2x^2 + 3x\right)\hat{\mathbf{i}}$

$$= \boxed{\left(3x^2 - 4x - 3\right)\hat{\mathbf{i}}}$$

(b) $F = 0$ when

$x = \boxed{1.87 \text{ and } -0.535}$.

(c) The stable point is at

$x = -0.535$, point of minimum $U(x)$.

The unstable point is at

$x = 1.87$, maximum in $U(x)$.

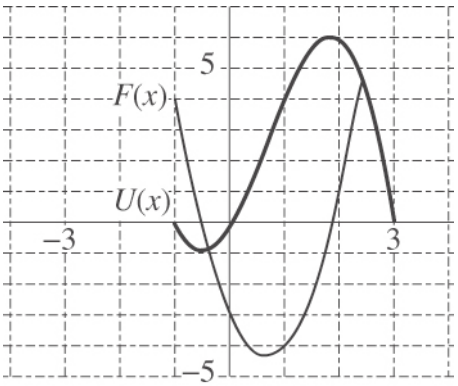

ANS. FIG. P6.64

***P6.65** (a) We assume the spring lies in the horizontal plane of the motion, then the radius of the puck's motion is $r = L_0 + x$ where $L_0 = 0.155$ m is the unstretched length. The spring force causes the puck's centripetal acceleration:

$$F = mv^2/r \quad \rightarrow \quad kx = m\left(2\pi r/T\right)^2/r \quad \rightarrow \quad kT^2x = 4\pi^2 mr$$

Substituting $r = (L_0 + x)$, we have

$$kT^2x = 4\pi^2 m\left(L_0 + x\right)$$

$$kx = \frac{\left(4\pi^2 mL_0\right)}{T^2} + \frac{x\left(4\pi^2 m\right)}{T^2}$$

$$x\left(k - \frac{4\pi^2 m}{T^2}\right) = \frac{4\pi^2 mL_0}{T^2}$$

$$x = \frac{4\pi^2 mL_0/T^2}{k - 4\pi^2 mL_0/T^2}$$

For $k = 4.30$ N/m, $L_0 = 0.155$ m, and $T = 1.30$ s, we have

$$x = \frac{4\pi^2 m(0.155 \text{ m})/(1.30 \text{ s})^2}{4.30 \text{ N/m} - 4\pi^2 m/(1.30 \text{ s})^2}$$

$$= \frac{\left(3.62 \text{ m/s}^2\right)m}{4.30 \text{ kg/s}^2 - \left(23.36/\text{s}^2\right)m}$$

$$= \frac{(3.62 \text{ m})m}{\left[4.30 \text{ kg} - (23.36)m\right]}\frac{1/\text{s}^2}{1/\text{s}^2}$$

$$\boxed{x = \frac{(3.62 \text{ m})m}{4.30 \text{ kg} - (23.4)m}}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(b) For $m = 0.070$ kg,

$$x = \frac{(3.62 \text{ m})[0.070 \text{ kg}]}{4.30 \text{ kg} - 23.36(0.070 \text{ kg})}$$

$$= \boxed{0.095\ 1 \text{ m}}$$

(c) We double the puck mass and find

$$x = \frac{(3.6208 \text{ m})[0.140 \text{ kg}]}{4.30 \text{ kg} - 23.360(0.140 \text{ kg})}$$

$$= \boxed{0.492 \text{ m}}$$

more than twice as big!

(d) For $m = 0.180$ kg,

$$x = \frac{(3.62 \text{ m})[0.180 \text{ kg}]}{4.30 \text{ kg} - 23.36(0.180 \text{ kg})}$$

$$= \frac{0.652}{0.0952} \text{ m} = \boxed{6.85 \text{ m}}$$

We have to get a bigger table!

(e) When the denominator of the fraction goes to zero, the extension becomes infinite. This happens for 4.3 kg – 23.4 m = 0; that is for $m = 0.184$ kg. For any larger mass, the spring cannot constrain the motion. The situation is impossible.

(f) The extension is directly proportional to m when m is only a few grams. Then it grows faster and faster, diverging to infinity for $m = 0.184$ kg.

***P6.66** (a) We write

$$F = ax^b$$

$$1\,000 \text{ N} = a(0.129 \text{ m})^b$$

$$5\,000 \text{ N} = a(0.315 \text{ m})^b$$

Dividing the two equations gives,

$$5 = \left(\frac{0.315}{0.129}\right)^b = 2.44^b$$

$$\ln 5 = b \ln 2.44$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

$$b = \frac{\ln 5}{\ln 2.44} = \boxed{1.80 = b}$$

$$a = \frac{1\,000 \text{ N}}{(0.129 \text{ m})^{1.80}} = \boxed{4.01 \times 10^4 \text{ N/m}^{1.8} = a}$$

(b) $$W = \int_i^f F_{\text{applied}}\, dx = \int_0^x ax^b\, dx = \frac{ax^{b+1}}{b+1}\bigg|_0^x = \frac{ax^{b+1}}{b+1} - 0 = \frac{ax^{b+1}}{b+1}$$

$$W = \frac{(4.01 \times 10^4 \text{ N/m}^{1.8})x^{2.8}}{2.80}$$

For $x = 0.250$ m,

$$W = \frac{(4.01 \times 10^4 \text{ N/m}^{1.8})(0.250 \text{ m})^{2.8}}{2.80}$$

$$= \frac{(4.01 \times 10^4 \text{ N/m}^{1.8})(0.250)^{2.8}(\text{m}^{2.8})}{2.80}$$

$$W = \frac{(4.01 \times 10^4 \text{ N} \cdot \text{m})(0.250)^{2.8}}{2.80} = \boxed{295 \text{ J}}$$

P6.67 (a) $$\vec{\mathbf{F}}_1 = (25.0 \text{ N})\left(\cos 35.0°\,\hat{\mathbf{i}} + \sin 35.0°\,\hat{\mathbf{j}}\right) = \boxed{\left(20.5\hat{\mathbf{i}} + 14.3\hat{\mathbf{j}}\right) \text{ N}}$$

$$\vec{\mathbf{F}}_2 = (42.0 \text{ N})\left(\cos 150°\,\hat{\mathbf{i}} + \sin 150°\,\hat{\mathbf{j}}\right) = \boxed{\left(-36.4\hat{\mathbf{i}} + 21.0\hat{\mathbf{j}}\right) \text{ N}}$$

(b) $$\sum \vec{\mathbf{F}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 = \boxed{\left(-15.9\hat{\mathbf{i}} + 35.3\hat{\mathbf{j}}\right) \text{ N}}$$

(c) $$\vec{\mathbf{a}} = \frac{\sum \vec{\mathbf{F}}}{m} = \boxed{\left(-3.18\hat{\mathbf{i}} + 7.07\hat{\mathbf{j}}\right) \text{ m/s}^2}$$

(d) $$\vec{\mathbf{v}}_f = \vec{\mathbf{v}}_i + \vec{\mathbf{a}}t = \left(4.00\hat{\mathbf{i}} + 2.50\hat{\mathbf{j}}\right) \text{ m/s} + \left(-3.18\hat{\mathbf{i}} + 7.07\hat{\mathbf{j}}\right)\left(\text{m/s}^2\right)(3.00 \text{ s})$$

$$\vec{\mathbf{v}}_f = \boxed{\left(-5.54\hat{\mathbf{i}} + 23.7\hat{\mathbf{j}}\right) \text{ m/s}}$$

(e) $$\vec{\mathbf{r}}_f = \vec{\mathbf{r}}_i + \vec{\mathbf{v}}_i t + \frac{1}{2}\vec{\mathbf{a}}t^2$$

$$\vec{\mathbf{r}}_f = 0 + \left(4.00\hat{\mathbf{i}} + 2.50\hat{\mathbf{j}}\right)(\text{m/s})(3.00 \text{ s}) + \frac{1}{2}\left(-3.18\hat{\mathbf{i}} + 7.07\hat{\mathbf{j}}\right)\left(\text{m/s}^2\right)(3.00 \text{ s})^2$$

$$\Delta\vec{\mathbf{r}} = \vec{\mathbf{r}}_f = \boxed{\left(-2.30\hat{\mathbf{i}} + 39.3\hat{\mathbf{j}}\right) \text{ m}}$$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

(f) $K_f = \frac{1}{2}mv_f^2 = \frac{1}{2}(5.00\text{ kg})\left[(5.54)^2 + (23.7)^2\right](\text{m/s}^2) = \boxed{1.48\text{ kJ}}$

(g) $K_f = \frac{1}{2}mv_i^2 + \sum \vec{\mathbf{F}} \cdot \Delta\vec{\mathbf{r}}$

$$K_f = \frac{1}{2}(5.00\text{ kg})\left[(4.00)^2 + (2.50)^2\right](\text{m/s})^2 + \left[(-15.9\text{ N})(-2.30\text{ m}) + (35.3\text{ N})(39.3\text{ m})\right]$$

$K_f = 55.6\text{ J} + 1\,426\text{ J} = \boxed{1.48\text{ kJ}}$

(h) The work-kinetic energy theorem is consistent with Newton's second law, used in deriving it.

P6.68 (a) The new length of each spring is $\sqrt{x^2 + L^2}$, so its extension is $\sqrt{x^2 + L^2} - L$ and the force it exerts is $k\left(\sqrt{x^2 + L^2} - L\right)$ toward its fixed end. The y components of the two spring forces add to zero. Their x components (with $\cos\theta = \frac{x}{\sqrt{x^2 + L^2}}$) add to

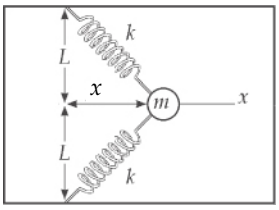

ANS. FIG. P6.68

$$\vec{\mathbf{F}} = -2k\left(\sqrt{x^2 + L^2} - L\right)\frac{x}{\sqrt{x^2 + L^2}}\hat{\mathbf{i}}$$

$$= \boxed{-2kx\left(1 - \frac{L}{\sqrt{x^2 + L^2}}\right)\hat{\mathbf{i}}}$$

(b) Choose $U = 0$ at $x = 0$. Then at any point the potential energy of the system is

$$U(x) = -\int_0^x F_x\,dx = -\int_0^x \left(-2kx + \frac{2kLx}{\sqrt{x^2 + L^2}}\right)dx$$

$$= 2k\int_0^x x\,dx - 2kL\int_0^x \frac{x}{\sqrt{x^2 + L^2}}\,dx$$

$$U(x) = \boxed{kx^2 + 2kL\left(L - \sqrt{x^2 + L^2}\right)}$$

(c) $U(x) = (40.0\text{ N/m})x^2 + (96.0\text{ N})\left(1.20\text{ m} - \sqrt{x^2 + 1.44\text{ m}^2}\right)$

For negative x, $U(x)$ has the same value as for positive x. The only equilibrium point (i.e., where $F_x = 0$) is $\boxed{x = 0}$.

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

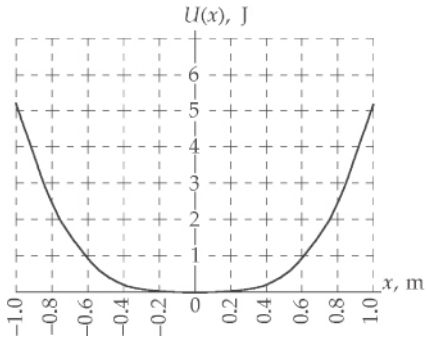

ANS FIG. P6.68(c)

(d) If we consider the particle alone as a system, the change in its kinetic energy is the work done by the force of the springs on the particle: $W = \Delta K$. For the entire system of particle and springs, this work is internal work and equal to the negative of the change in potential energy of the system: $\Delta K = -\Delta U$. From part (c), we evaluate U for $x = 0.500$ m:

$$U = (40.0 \text{ N/m})(0.500 \text{ m})^2 + (96.0 \text{ N})\left(1.20 \text{ m} - \sqrt{(0.500 \text{ m})^2 + 1.44 \text{ m}^2}\right)$$

$$= 0.400 \text{ J}$$

Now find the speed of the particle:

$$\frac{1}{2}mv^2 = -\Delta U$$

$$v = \sqrt{\frac{-2\Delta U}{m}} = \sqrt{\frac{-2}{1.18 \text{ kg}}(0 - 0.400 \text{ J})} = \boxed{0.823 \text{ m/s}}$$

P6.69 (a)

F (N)	L (mm)	F (N)	L (mm)
0.00	0.00	12.0	98.0
2.00	15.0	14.0	112
4.00	32.0	16.0	126
6.00	49.0	18.0	149
8.00	64.0	20.0	175
10.0	79.0	22.0	190

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

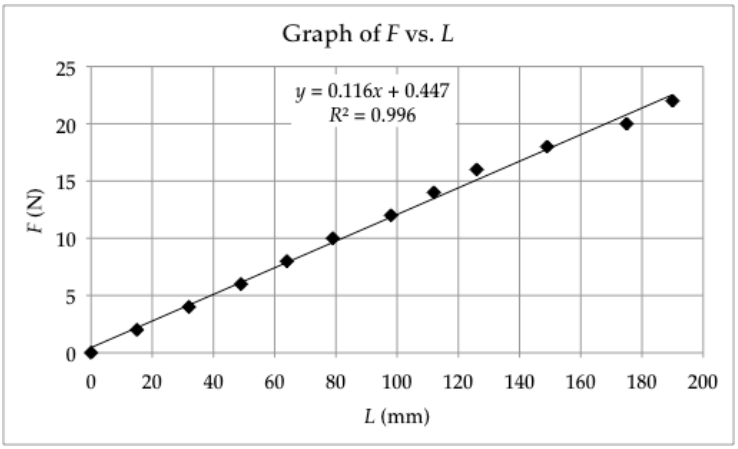

ANS FIG. P6.69(a)

(b) By least-squares fitting, its slope is 0.116 N/mm = $\boxed{116 \text{ N/m}}$.

(c) To draw the straight line we use all the points listed and also the origin. If the coils of the spring touched each other, a bend or nonlinearity could show up at the bottom end of the graph. If the spring were stretched "too far," a nonlinearity could show up at the top end. But there is no visible evidence for a bend in the graph near either end.

(d) In the equation $F = kx$, the spring constant k is the slope of the F-versus-x graph.

$$\boxed{k = 116 \text{ N/m}}$$

(e) $F = kx = (116 \text{ N/m})(0.105 \text{ m}) = \boxed{12.2 \text{ N}}$

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

ANSWERS TO EVEN-NUMBERED PROBLEMS

P6.2 (a) 3.28×10^{-2} J; (b) -3.28×10^{-2} J

P6.4 1.56×10^{4} J

P6.6 (a) 1.6×10^{3} J; (b) 0; (c) force is smaller than before; (d) work performed is smaller

P6.8 $A_x B_x + A_y B_y + A_z B_z$

P6.10 5.33 J

P6.12 (a) 11.3°; (b) 156°; (c) 82.3°

P6.14 (a) 24.0 J; (b) −3.00 J; (c) 21.0 J

P6.16 (a) 575 N/m; (b) 46.0 J

P6.18 (a) $mg\cos\theta$; (b) mgR

P6.20 (a) $mg\left(\frac{1}{k_1}+\frac{1}{k_2}\right)$; (b) $\frac{1}{1/k_1 + 1/k_2}$

P6.22 $\frac{\text{kg}}{\text{s}^2}$

P6.24 (a) See ANS. FIG. P6.24; (b) −12.0 J

P6.26 (a) -1.23 m/s^2, 0.616 m/s^2; (b) -0.252 m/s^2 if the force of static friction is not too large, zero; (c) 0

P6.28 (a) 9.00 kJ; (b) 11.7 kJ; (c) The work is greater by 29.6%

P6.30 (a) 29.2 N; (b) speed would increase; (c) crate would slow down and come to rest

P6.32 (a) 1.94 m/s; (b) 3.35 m/s; (c) 3.87 m/s

P6.34 (a) 3.78×10^{-16} J; (b) 1.35×10^{-14} N; (c) $1.48 \times 10^{+16}$ m/s^2; (d) 1.94×10^{-9} s

P6.36 (a) $F_{\text{avg}} = 2.34 \times 10^{4}$ N, opposite to the direction of motion; (b) 1.91×10^{-4} s

P6.38 (a) 4.56 kJ; (b) 4.56 kJ; (c) 6.34 kN; (d) 422 km/s^2; (e) 6.34 kN; (f) The forces are the same. The two theories agree.

P6.40 (a) 800 J; (b) 107 J; (c) $U_g = 0$

P6.42 (a) −196 J; (b) −196 J; (c) −196 J; (d) The results should be all the same, since the gravitational force is conservative.

P6.44 (a) $\vec{\mathbf{F}} \cdot \left(\vec{\mathbf{r}}_{\text{fi}} - \vec{\mathbf{r}}_i\right)$, which depends only on end points, not path; (b) 35.0 J

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

P6.46 $\dfrac{A}{r^2}$

P6.48 $\left(7 - 9x^2y\right)\hat{\mathbf{i}} - 3x^3\hat{\mathbf{j}}$

P6.50 4.17×10^{10} J

P6.52 (a) -1.67×10^{-14} J; (b) At the center of the triangle

P6.54 (a) F_x is zero at points A, C, and E; F_x is positive at point B and negative at point D; (b) A and E are unstable, and C is stable; (c) See ANS. FIG. P6.54

P6.56 (a) 6.75 W/m^2; (b) 6.64×10^3 W/m^2; (c) A powerful automobile running on sunlight would have to carry on its roof a solar panel that is huge compared to the size of the car; (d) Agriculture and forestry for food and fuels, space heating of large and small buildings, water heating, and heating for drying and many other processes are current and potential applications of solar energy.

P6.58 $k_1 \dfrac{x_{\max}^2}{2} + k_2 \dfrac{x_{\max}^3}{3}$

P6.60 The ball will simply stop momentarily and roll back to the spring.

P6.62 $x = \dfrac{g \sin\theta \sqrt{\left(g \sin\theta\right)^2 + \left(\dfrac{k}{m}\right)\left[v^2 + 2(g \sin\theta)d\right]}}{k / m}$

P6.64 (a) $\left(3x^2 - 4x - 3\right)\hat{\mathbf{i}}$; (b) 1.87 and −0.535; (c) See ANS. FIG. P6.64

P6.66 (a) $1.80 = b$, 4.01×10^4 N/m$^{1.8} = a$; (b) 295 J

P6.68 (a) $-2kx\left(1 - \dfrac{L}{\sqrt{x^2 + L^2}}\right)\hat{\mathbf{i}}$; (b) $kx^2 + 2kL\left(L - \sqrt{x^2 + L^2}\right)$; (c) See ANS. FIG. P6.68(c), $x = 0$; (d) $v = 0.823$ m/s

© 2013 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.